


Seat Belt Latch Stop Installation

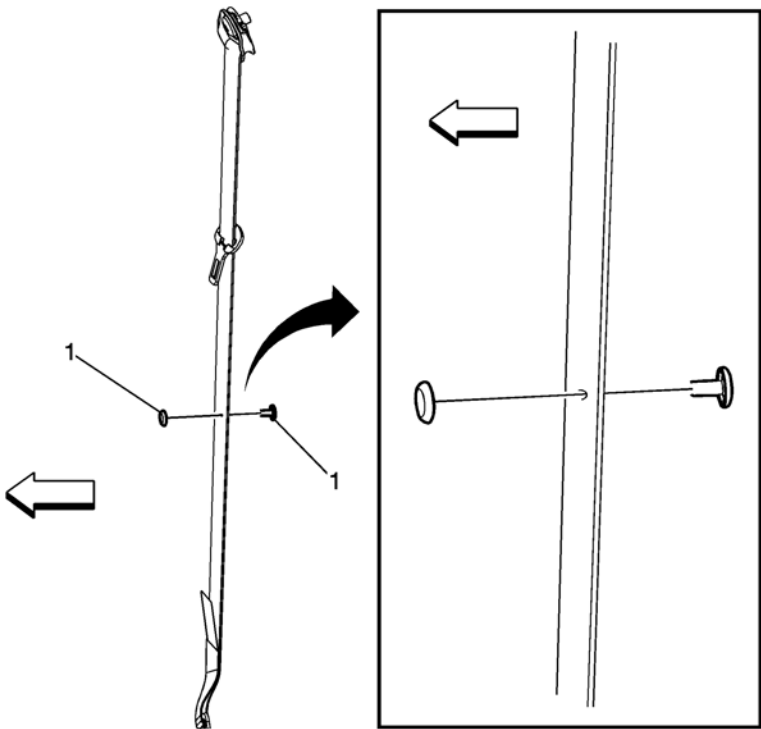

Callout	Component Name
<p><b>Preliminary Procedure</b></p> <ol style="list-style-type: none"><li>1. Locate the hole in the seat belt webbing where the original seat belt stop button was located.</li><li>2. If the original hole in the seat belt webbing is not visible, perform the following:<ul style="list-style-type: none"><li>• If either the right or left stop button is missing use the opposing seat belt as a reference.</li><li>• With the opposing seat belt fully stowed, measure the distance between the seat belt lower anchor and the stop button.</li><li>• Using the measurement obtained above, measure and mark the location of the missing stop button on the center of the seat belt webbing.</li></ul></li><li>3. Ensure the seat belt latch plate is located above the mark or original hole.</li></ol>	
1	<p>Seat Belt Stop Button</p> <p><b>Procedure</b></p> <ol style="list-style-type: none"><li>1. Work the male half of the stop button through the hole in the webbing or at the marked location.</li><li>2. Align the female half of the stop button with the male half of the stop button.</li><li>3. Snap the two halves together.</li><li>4. Trim off any excess of the male half of the stop button flush with the female half of the stop button.</li></ol> <p><b>Tip</b> Ensure the male half of the stop button is facing forward in the vehicle in order to ensure the stop button will not snag customers clothing.</p>