


Instrument Cluster Replacement

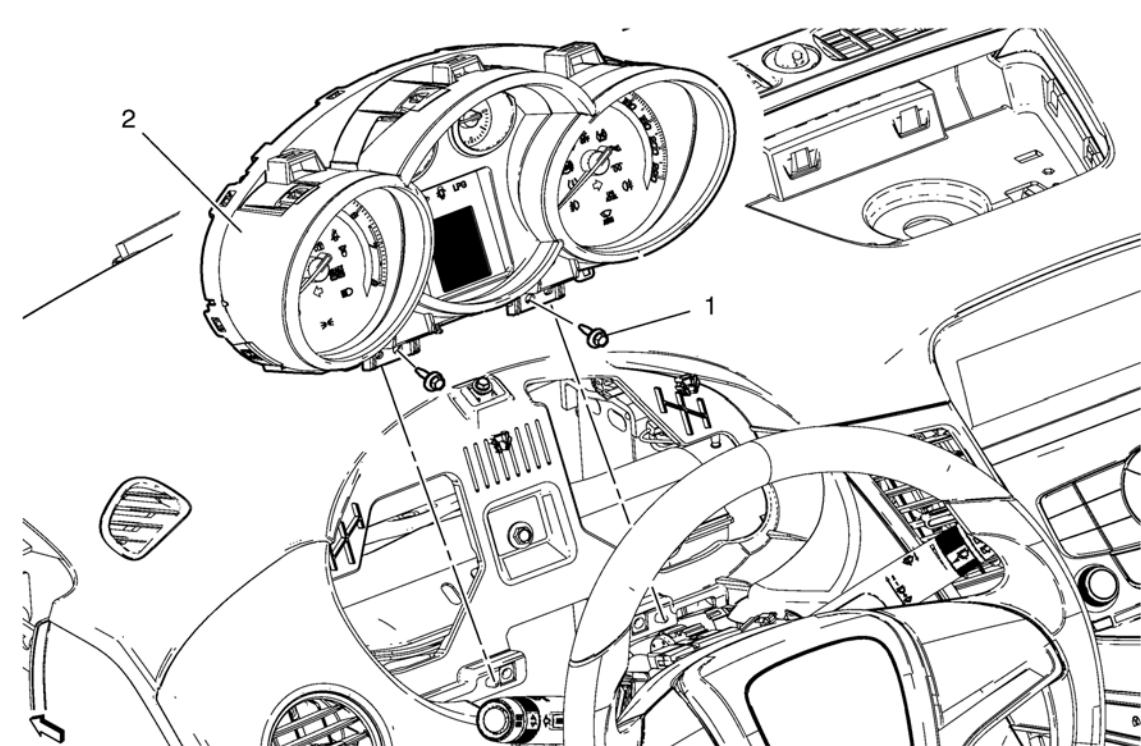

Callout	Component Name
Preliminary Procedure 1. Remove instrument panel lower cluster trim plate. Refer to Instrument Panel Cluster Lower Trim Plate Replacement . 2. Remove instrument panel steering column upper trim cover. Refer to Steering Column Upper Trim Cover Replacement .	
1	Instrument Cluster Screw (Qty: 2) Caution: Refer to Fastener Caution in the Preface section. Tighten 2.5 N·m (22 lb in)
2	Instrument Cluster Assembly Procedure 1. Disconnect electrical components. 2. After repairs, refer to Control Module References