


Front Fog Lamp Bulb Replacement

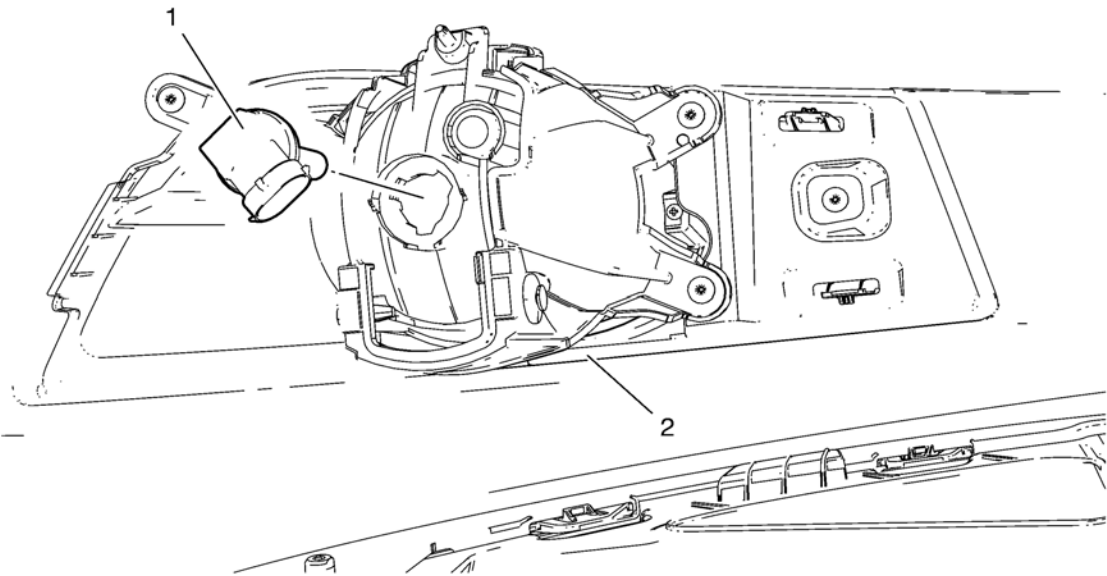

Callout	Component Name
<p>Preliminary Procedures</p> <p>1. Raise and support the vehicle. Refer to Lifting and Jacking the Vehicle</p> <p>2. Disconnect the forward lamp electrical harness connector from the fog lamp bulb socket.</p> <p>3. Remove the Front Bumper Fascia Opening Lower Cover. Refer to Front Bumper Fascia Opening Lower Cover Replacement.</p>	
1	<p>Front Fog Lamp Projector Bulb</p> <p>Warning: Refer to Halogen Bulb Warning in the Preface section.</p> <p>Procedure</p> <p>Rotate the bulb socket counterclockwise to remove from the lamp housing.</p>
2	<p>Front Fog Lamp Assembly</p> <p>Procedure</p> <p>Remove the lamp assembly from the fog lamp bracket.</p>