


Rear Side Door Trim Replacement

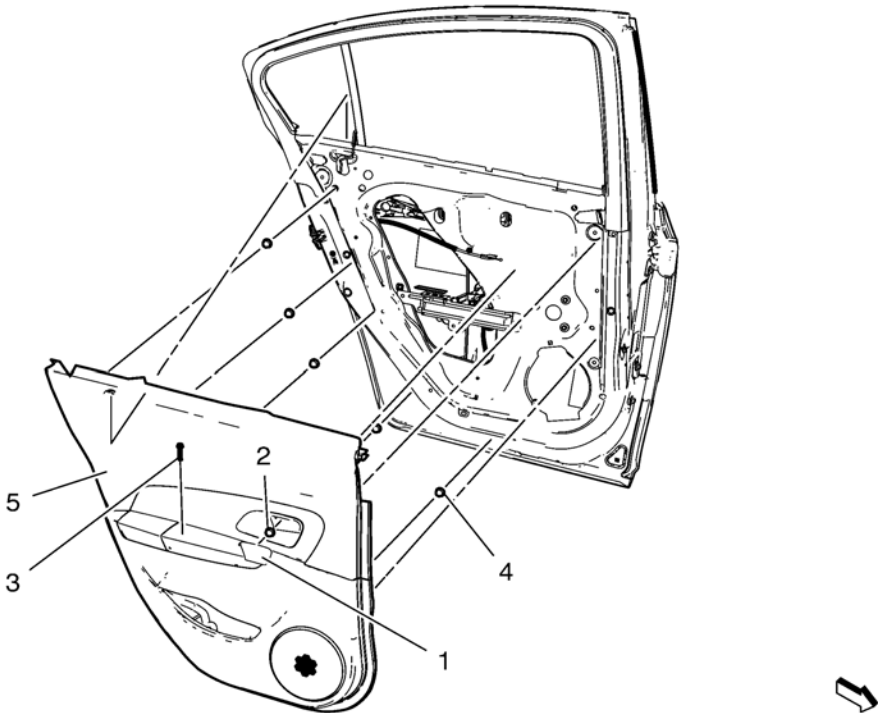

Callout	Component Name
1	Rear Side Door Inside Handle Bolt Finish Cap Procedure Pull handle back to remove cap. Use suitable tool to unsnap.
2	Rear Side Door Inside Handle Screw Caution: Refer to Fastener Caution in the Preface section. Tighten 2.5 N·m (23 lb in)
3	Rear Side Door Pull Handle Screw Tighten 2.5 N·m (23 lb in)
4	Rear Side Door Trim Clip (Qty: 5)
5	Rear Side Door Trim Assembly Procedure <div>1. Pull upwards on the door lock retainer cable to disengage. 2. Disconnect the electrical connectors.</div>