


1. Install front seat back cushion pad (2).
2. Install front seat back cushion cover (1).
 - Install cushion cover (1) to Velcro.
 - Attach cushion cover to frame (3).
3. Install cushion cover (1) to backside.
 - Install cushion covering all the way around.
 - Close 2 zippers on backside.

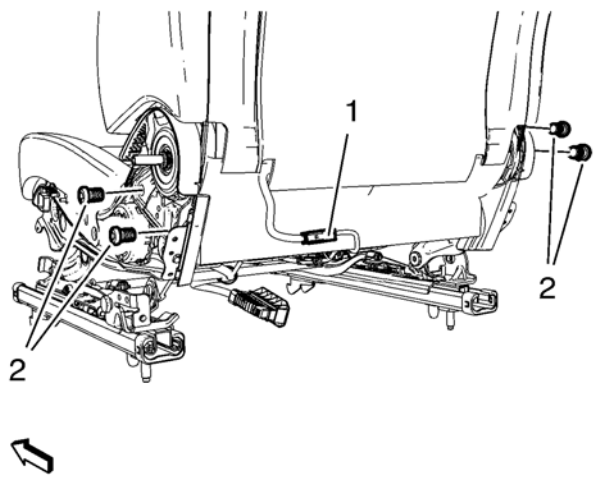

4. Install backrest.

Caution: Refer to [Fastener Caution](#) in the Preface section.

5. Install the front seat backrest bolts (2) and tighten to **35 N·m (26 lb ft)**.
6. Connect and latch wiring harness plug (1), if equipped.
7. Attach cushion cover to backrest below.
8. Install front seat head restraint guide. Refer to [Front Seat Head Restraint Guide Replacement](#).
9. Install seat cushion outer trim panel. Refer to [Front Seat Cushion Outer Trim Panel Replacement](#).
10. Install seat cushion inner trim panel. Refer to [Front Seat Cushion Inner Trim Panel Replacement](#).
11. Install front seat recliner handle. Refer to [Driver or Passenger Seat Recliner Handle Replacement](#).
12. Install front seat adjuster handle, if equipped.
13. Install driver or passenger seat. Refer to [Driver or Passenger Seat Replacement](#).