


Assist Handle Replacement

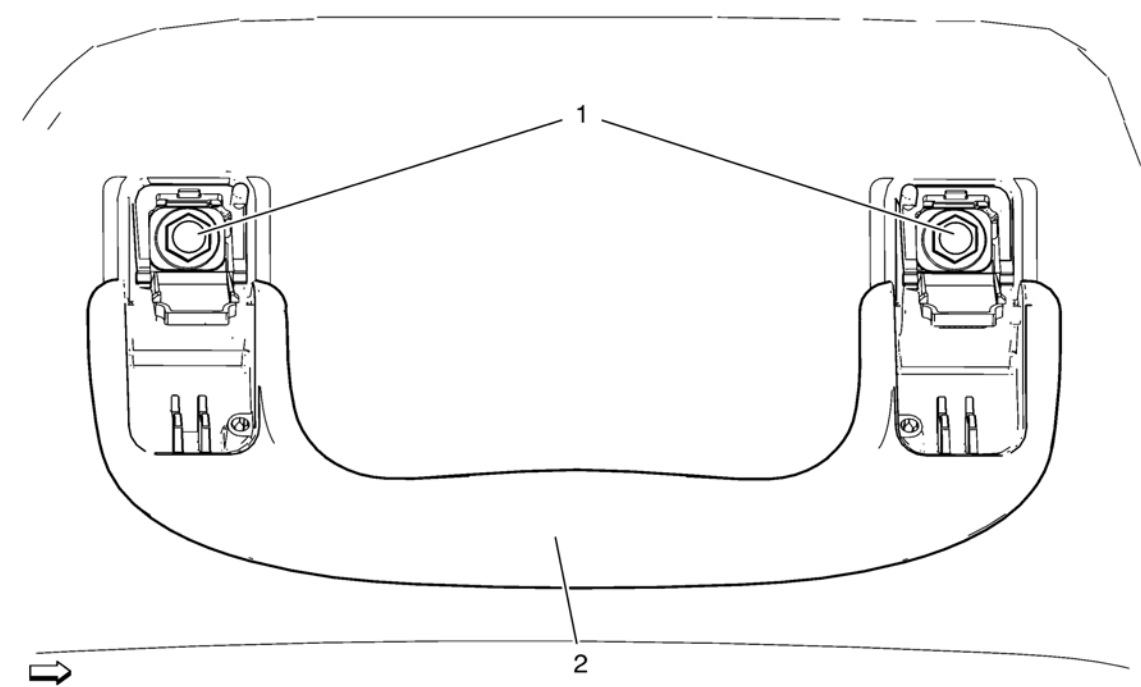

Callout	Component Name
1	<p>Assist Handle Screw (Qty: 2)</p> <p><b>Caution:</b> Refer to <a href="#">Fastener Caution</a> in the Preface section.</p> <p><b>Procedure</b></p> <ol style="list-style-type: none"><li>1. Fold the assist handle downward and hold.</li><li>2. Use a small flat-bladed tool to open the assist handle covers to access the screws.</li></ol> <p><b>Tighten</b> 6 N·m (53 lb in)</p>
2	Assist Handle Assembly