


Front Side Door Trim Replacement

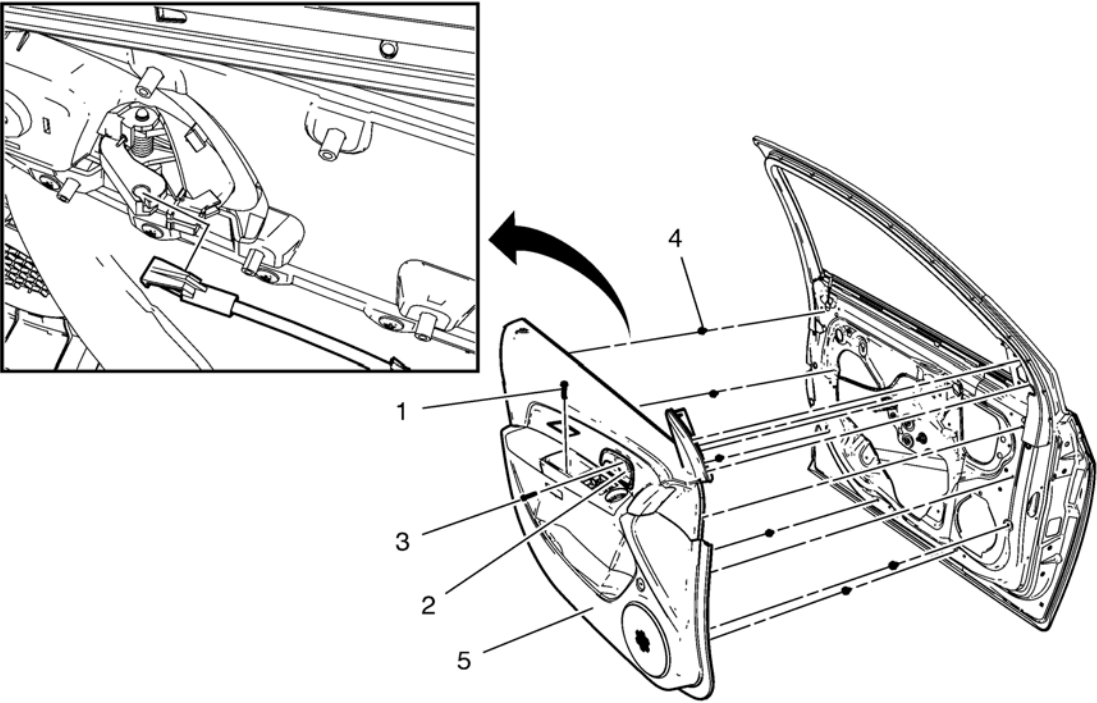

Callout	Component Name
1	Front Side Door Pull Handle Bolt <b>Caution:</b> Refer to <a href="#">Fastener Caution</a> in the Preface section. <b>Tighten</b> 2 N·m (18 lb in)
2	Front Side Door Inside Handle Bolt Finish Cap <b>Tip</b> Pull handle back to remove cap. Use suitable tool to unsnap.
3	Front Side Door Inside Handle Bolt <b>Tighten</b> 2.5 N·m (22 lb in)
4	Front Side Door Trim Clip (Qty: 10)
5	Front Side Door Trim Assembly <b>Procedure</b> <div>1. Pull upwards on the door lock retainer cable to disengage. 2. Disconnect the electrical connectors.</div>