


Sunroof Sunshade Replacement

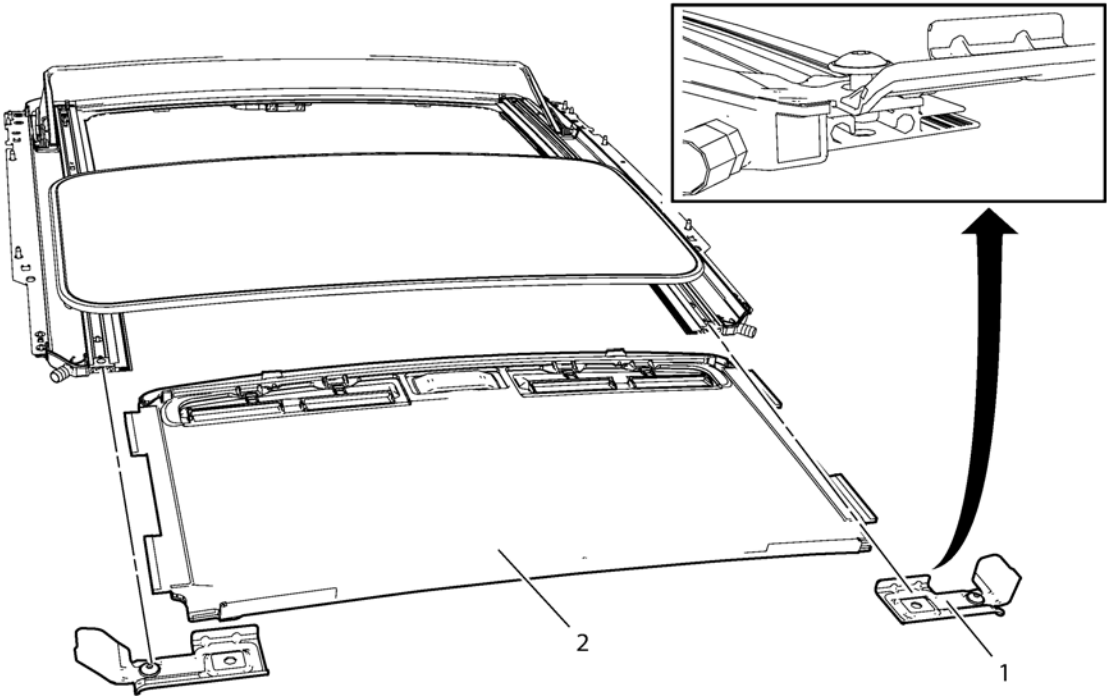

Callout	Component Name
<p>Preliminary Procedure</p> <p>1. Remove the headliner. Refer to Headlining Trim Panel Replacement.</p> <p>2. It is only necessary to lower the sunroof module assembly. Only perform the steps in the sunroof module assembly replacement procedure that will lower the sunroof module assembly enough to gain access to the sunroof module bracket screws. Refer to Sunroof Module Assembly Replacement.</p>	
1	<p>Sunroof Module Bracket Screw (Qty: 2)</p> <p>Caution: Refer to Fastener Caution in the Preface section.</p> <p>Tighten 9 N·m (80 lb in)</p>
2	<p>Sunroof Sunshade</p> <p>Procedure</p> <p>Push the sunshade assembly down to release from sunshade guide.</p>