


4. Install the wire harness (1), if equipped.

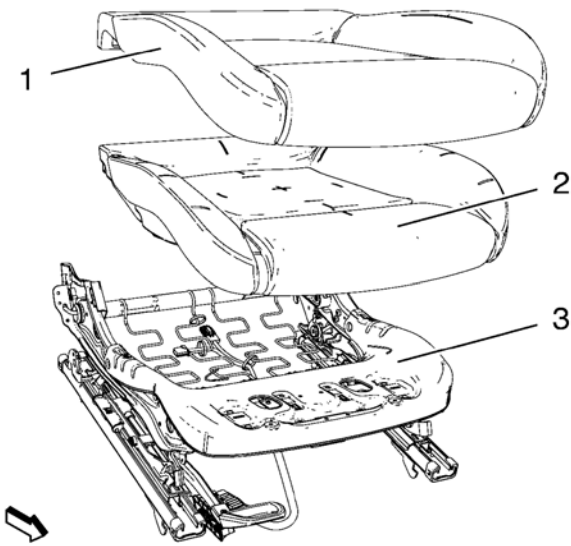

5. Install front seat cushion cover (1) and pad (2) to frame (3). Refer to [Front Seat Cushion Cover and Pad Replacement](#)