



2. Install the insulator clamp to the insulator:
- 2.1. Position the clamp (2) over on the insulator.
  - 2.2. Use two M8 bolts (1, 3) with 40 mm (1.57 in) length.
  - 2.3. Tighten bolts (1, 3) by turns until clamp (2) slips over insulator.

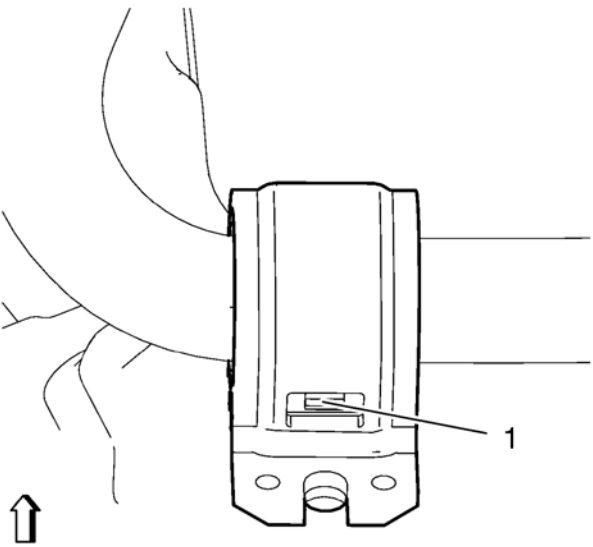

3. Check proper fitting of clamp and insulator.
- Retainer (1) MUST seat centrally in the hole of the clamp.

**Caution:** Refer to [Fastener Caution](#) in the Preface section.

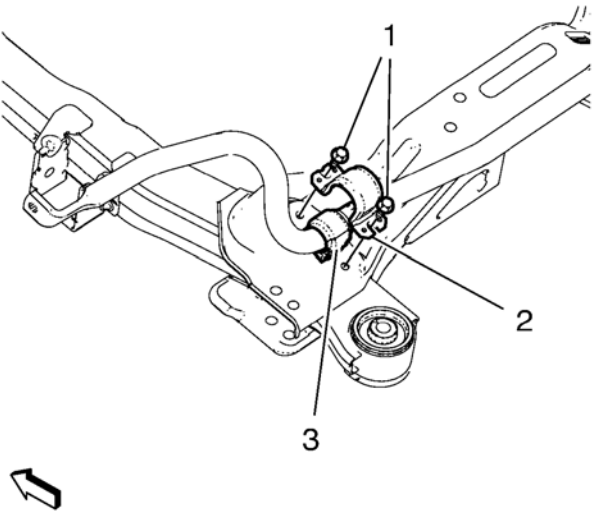

4. Install the NEW stabilizer shaft bolts (1) and tighten the NEW stabilizer shaft bolts to **22 N·m (17 lb ft) + 40°** using the *EN 45059* kit .