



Instrument Panel Tie Bar Replacement (Right Hand Drive)

Removal Procedure

1. Remove instrument panel compartment. Refer to [Instrument Panel Compartment Replacement](#).

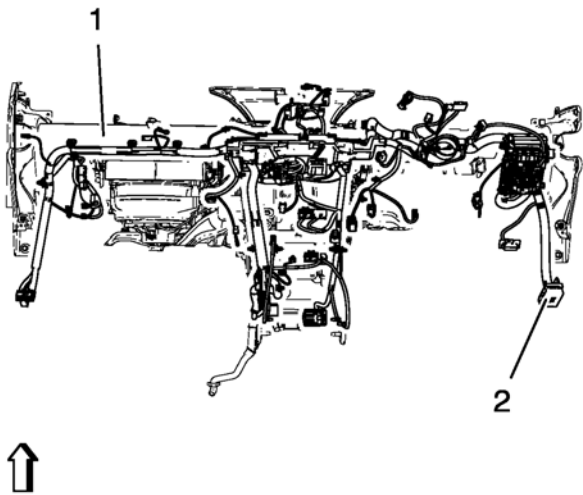


2. Remove instrument panel wiring harness (2) from instrument panel tie bar (1).
Disconnect electrical connectors.

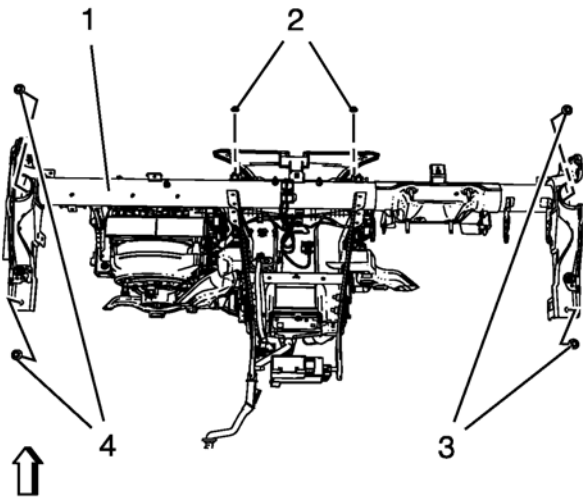

3. Remove instrument panel tie bar (1).
Remove 4 instrument panel tie bar bolts (3, 4).
Remove 2 instrument panel tie bar nuts (2).

Installation Procedure

Caution: Refer to [Fastener Caution](#) in the Preface section.

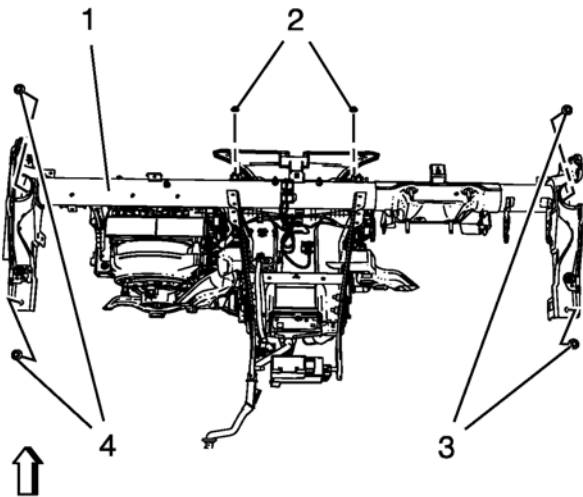

1. Install instrument panel tie bar (1).
Install 4 instrument panel tie bar bolts (3, 4) and tighten to **22 N·m (17 lb ft)**.
Install 2 instrument panel tie bar nuts (2) and tighten to **9 N·m (80 lb in)**.