


Rear Seat Back Cushion Cover and Pad Replacement - Right Side

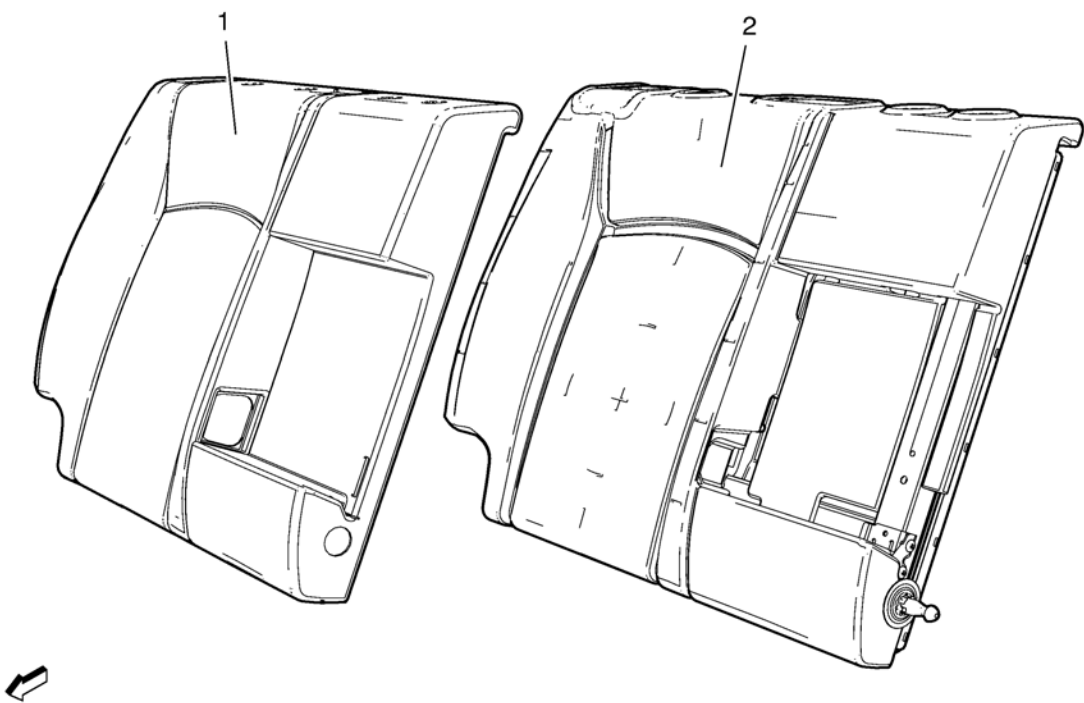

Callout	Component Name
<b>Preliminary Procedure</b>  1. Remove rear seat back - right side. Refer to <a href="#">Rear Seat Replacement</a> . 2. Remove rear seat armrest. Refer to <a href="#">Rear Seat Armrest Replacement</a> .	
1	Rear Seat Back Cushion Cover  <b>Procedure</b>  1. Remove the staples from the seat back cover. 2. Remove seat back cushion cover from Velcro.
2	Rear Seat Back Cushion Pad