


Rear Seat Back Latch Replacement (60 Percent Seat)

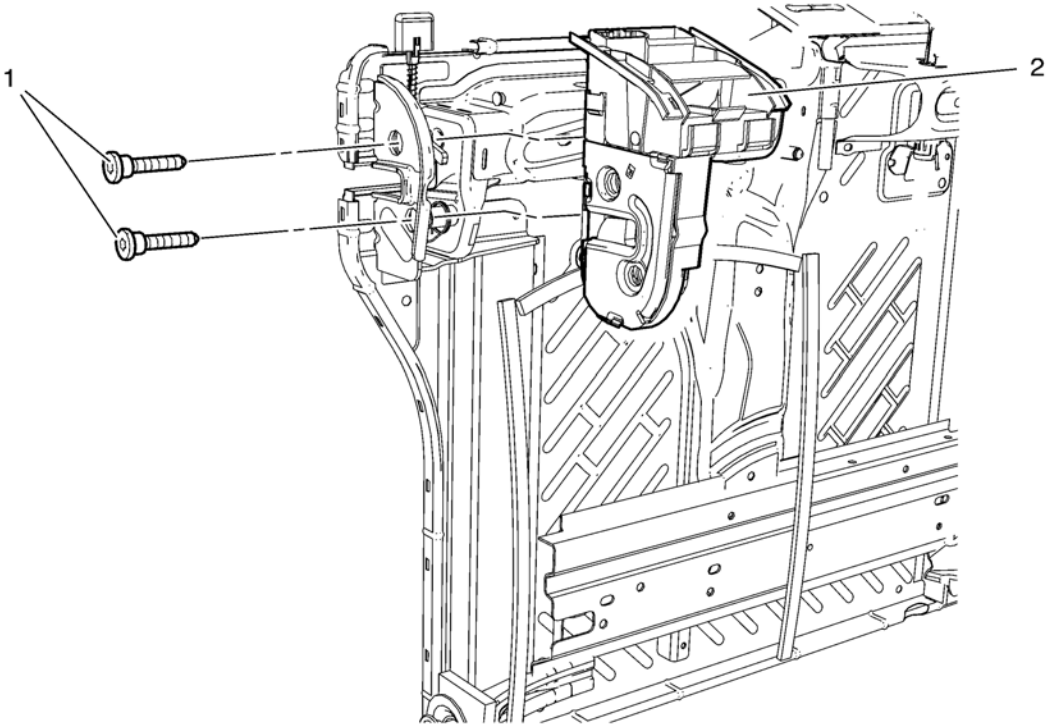

Callout	Component Name
<p>Preliminary Procedure</p> <p>1. Remove rear seat - right side. Refer to Rear Seat Replacement.</p> <p>2. Remove rear seat armrest. Refer to Rear Seat Armrest Replacement</p> <p>3. Remove rear seat back cushion cover and pad - right side. Refer to Rear Seat Back Cushion Cover and Pad Replacement - Right Side</p>	
1	<p>Rear Seat Back Latch Bolt (Qty: 2)</p> <p>Caution: Refer to Fastener Caution in the Preface section.</p> <p>Tighten 45 N·m (33 lb ft)</p>
2	<p>Rear Seat Back Latch</p>