



11. Release the roof rail front right and left.

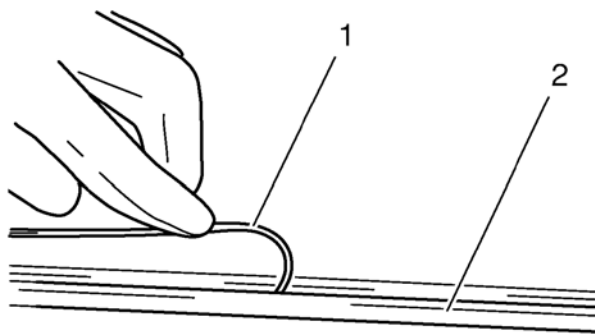

12. Lay the wire under the windshield all the way round.
The cutting wire (1) should be rolled in beneath the rubber window seal (2) at the windscreen.

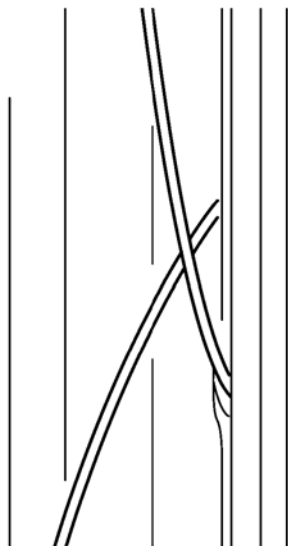

13. Pull the second wire end through.

- Stick awl approx. 10 mm (0.393 in) overlapping the first entry place with adhesive bed.
- Thread the cutting wire into the hole of the awl and bend it over.
- Pull the rest of the wire into the interior with the awl.

