


Rear Side Door Window Adjustment

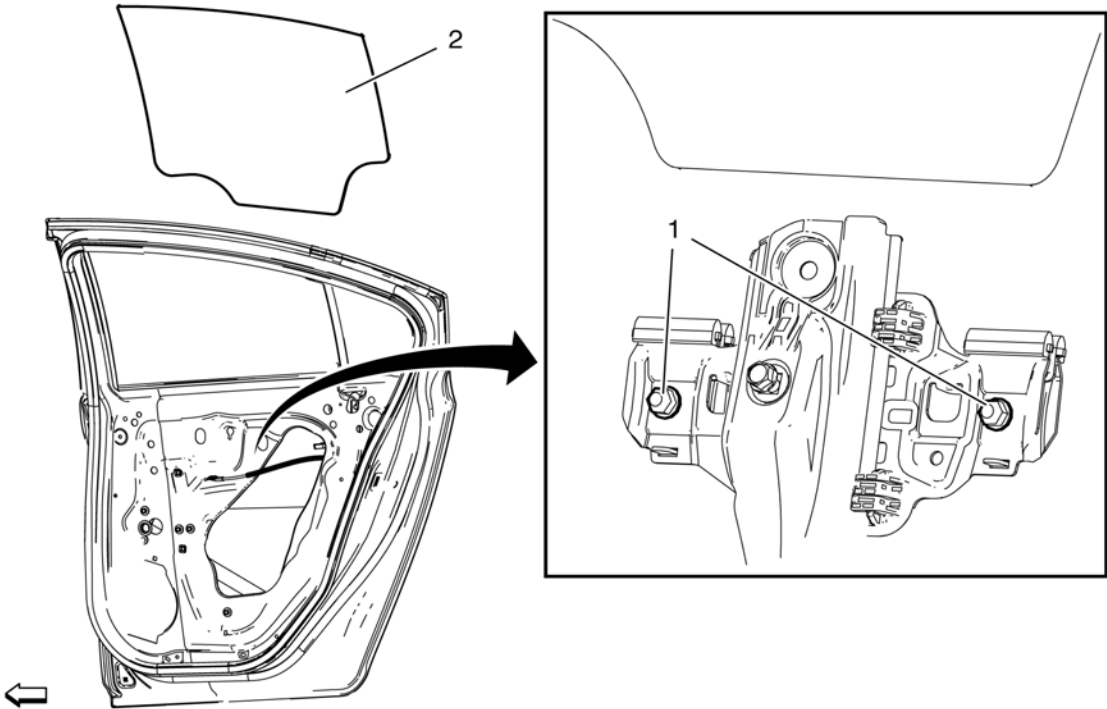

Callout	Component Name
<p>Warning: Refer to Glass and Sheet Metal Handling Warning in the Preface section.</p> <p>Warning: Refer to Express Window Down Warning in the Preface section.</p> <p>Preliminary Procedures</p> <ol style="list-style-type: none">Remove the rear side door trim. Refer to Rear Side Door Trim Replacement.Remove the water deflector. Refer to Rear Side Door Water Deflector Replacement.	
1	<p>Rear Side Door Window Regulator Sash Nut (Qty: 2)</p> <p>Caution: Refer to Fastener Caution in the Preface section.</p> <p>Tighten 10 N·m (89 lb in)</p>
2	<p>Rear Side Door Window</p> <p>Procedure</p> <ol style="list-style-type: none">Loosen the window regulator sash nuts.Connect the door trim panel wire connector. <p>Note: Start the vehicle to ensure maximum power to the window motor. This is required in order to fully seat the window for adjustment.</p> <ol style="list-style-type: none">Start the vehicle.Using the power window switch, raise the window to the full up position.Tighten the rear side door window regulator sash nuts.Inspect for proper window operation and a tight seal.Shut off the vehicle.