




5. Jigsaw carefully a V-cut (dashed line) into lower side (1) of rear axle bushing. Use lowest bore (2) to insert saw.

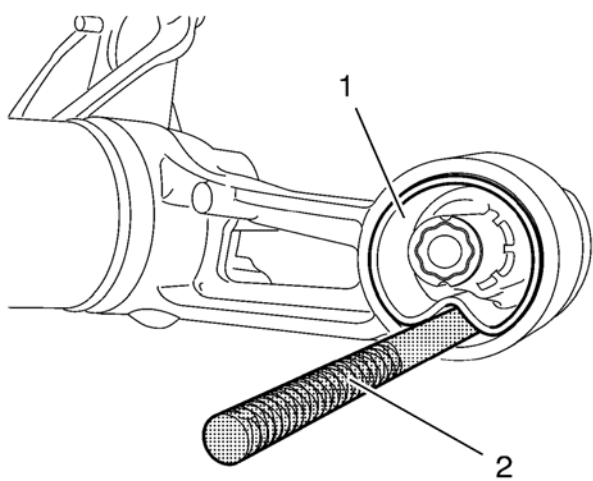


6. Remove bushing (1), using *CH-48377-1* chisel (2) and a hammer. Insert *CH-48377-1* chisel on place of V-cut.

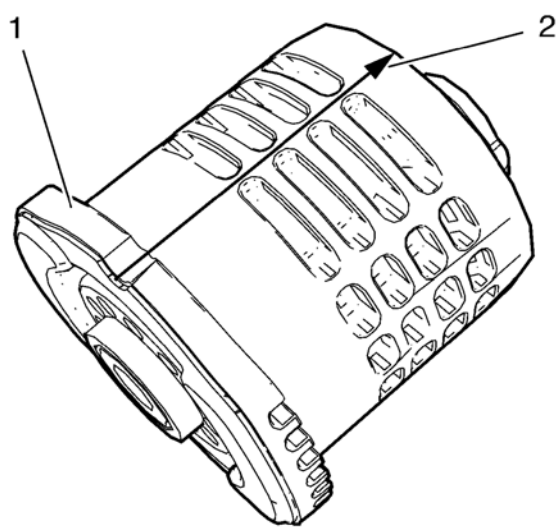

7. Mark installation position (2) of NEW rear axle bushing (1) as shown in graphic above

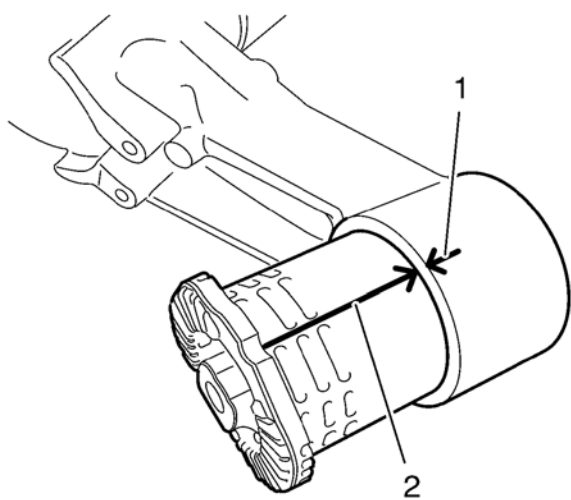

8. Align bushing marking (2) to rear axle marking (1).

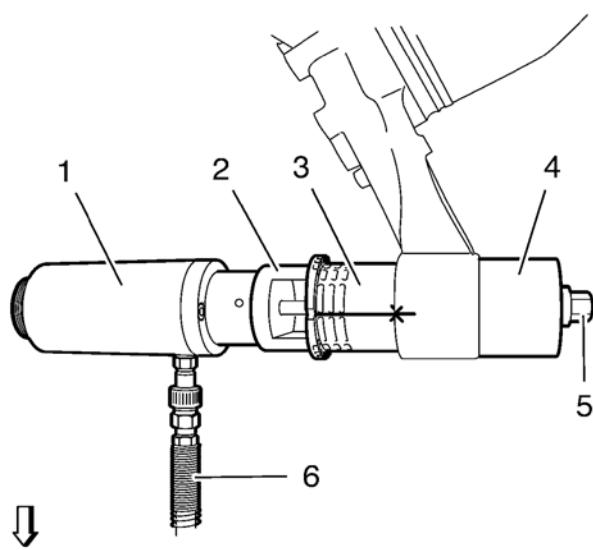

9. Install the following components onto rear axle bushing and rear axle: