


Front Fender Front Lower Bracket Replacement

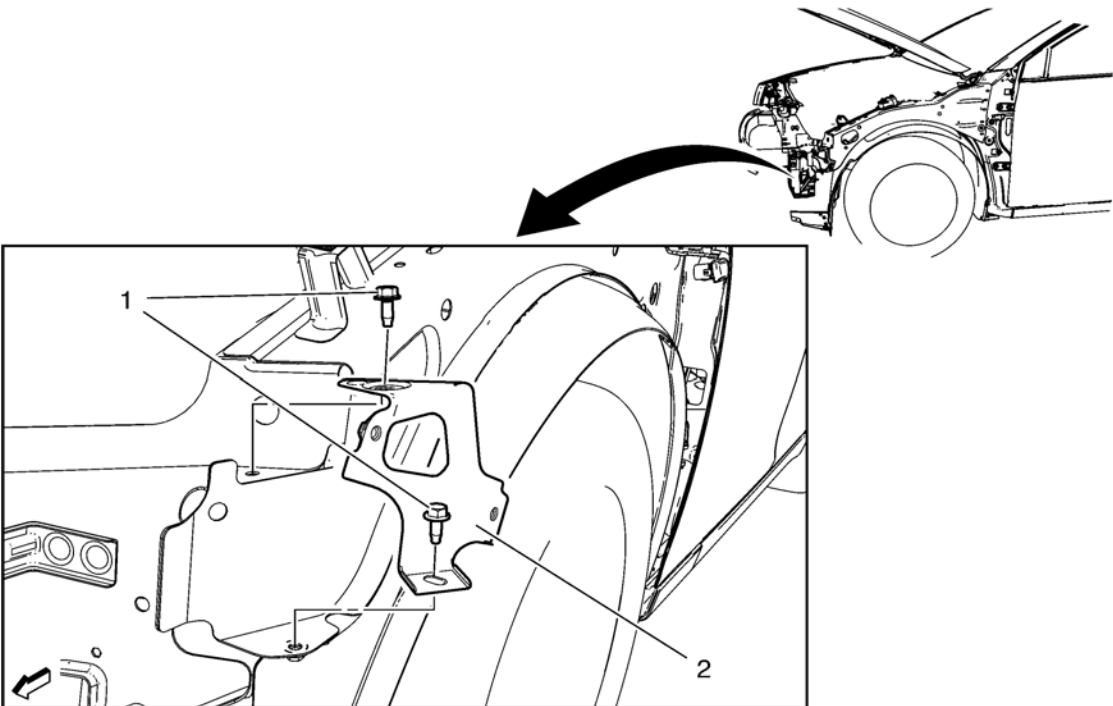

Callout	Component Name
<p>Preliminary Procedure</p> <p>1. Remove the front bumper fascia. Refer to Front Bumper Fascia Replacement.</p> <p>2. Remove the headlamp. Refer to Headlamp Replacement.</p> <p>3. Remove the front fender. Refer to Front Fender Replacement.</p>	
1	Front Fender Bracket Bolt Caution: Refer to Fastener Caution in the Preface section. Tighten 9 N·m(80 lb in)
2	Front Fender Front Lower Bracket