



10. Remove the damaged body lock pillar upper reinforcement.

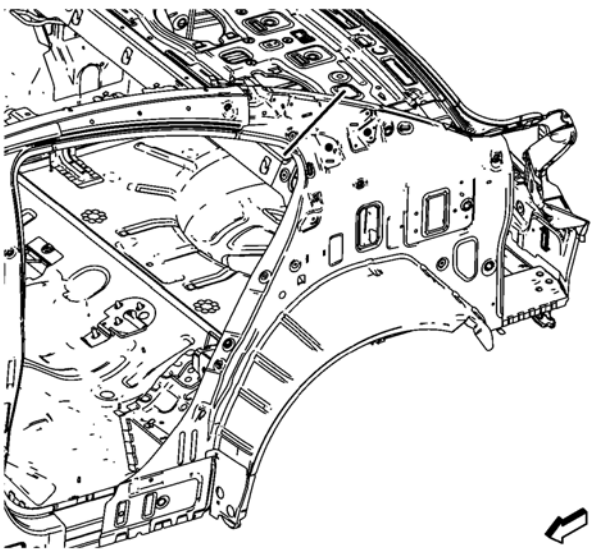

11. Create cut lines on the body side inner panel.

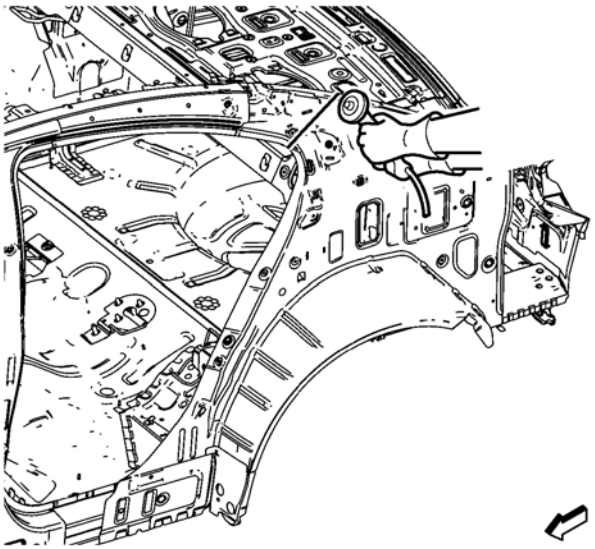

**Note:** Do not damage any other panels or reinforcements.

12. Cut the panel where sectioning is to be performed.

