



8. Remove the lower control (1) arm from the front frame.


Installation Procedure

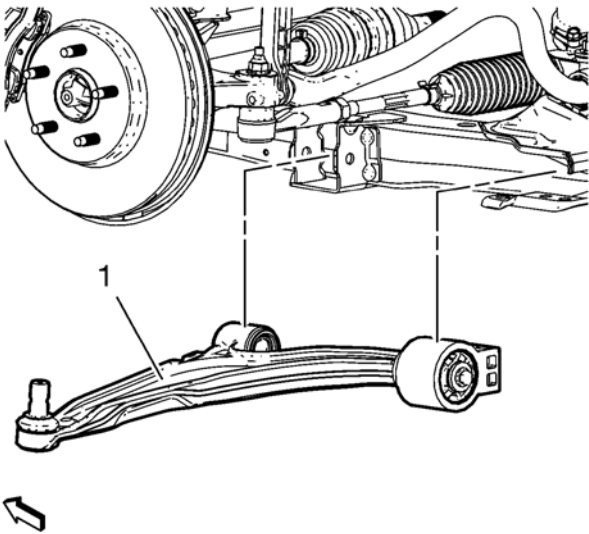

1. Position the lower control arm (1) in the cradle.

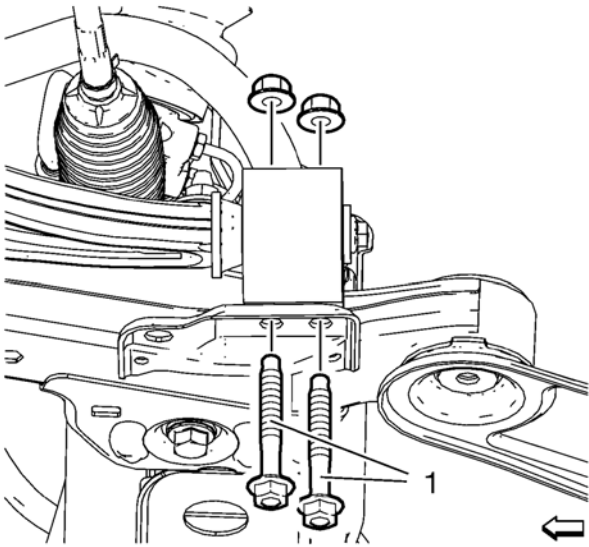

2. Install and hand tighten the NEW rear lower control arm bushing nuts and bolts (1).

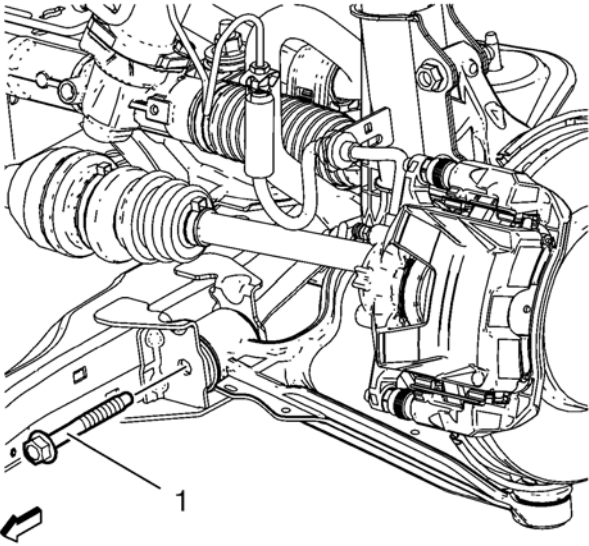

3. Install and hand tighten the NEW front lower control arm nut and bolt (1).