


Front Bumper Fascia Replacement

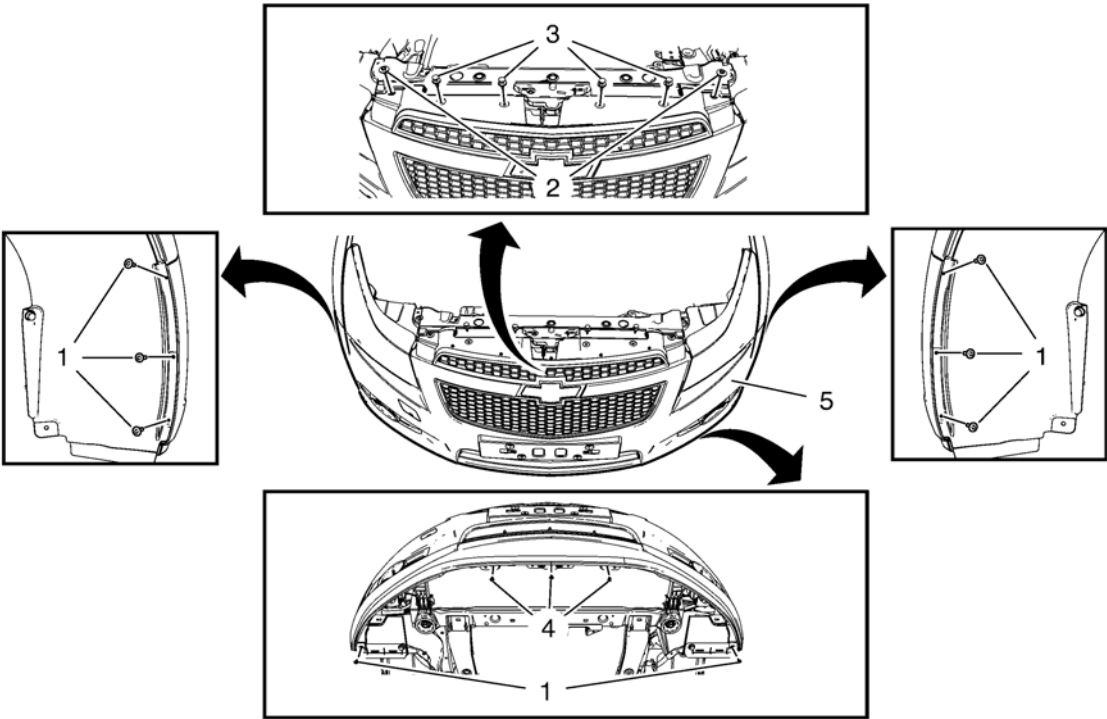

Callout	Component Name
Preliminary Procedure Remove the front bumper fascia opening cover. Refer to Front Bumper Fascia Opening Lower Cover Replacement .	
1	Front Wheelhouse Liner Bolt (Qty: 8) Caution: Refer to Fastener Caution in the Preface section. Tighten 2.5 N·m(23 lb in)
2	Front Bumper Fascia Bolt (Qty: 2) Tighten 9 N·m(80 lb in)
3	Front Bumper Fascia Retainer (Qty: 4)
4	Front Bumper Fascia Lower Stiffener Bolt (Qty: 3) Tip Only loosen the bolts. Tighten 2.5 N·m (23 lb in)
5	Front Bumper Fascia Procedure <ol style="list-style-type: none">1. Unclip from front bumper fascia guides.2. Pull forward to remove the front bumper fascia.3. Disconnect any electrical connectors.4. Transfer parts as needed.