


Instrument Panel Lower Trim Pad Cover Replacement

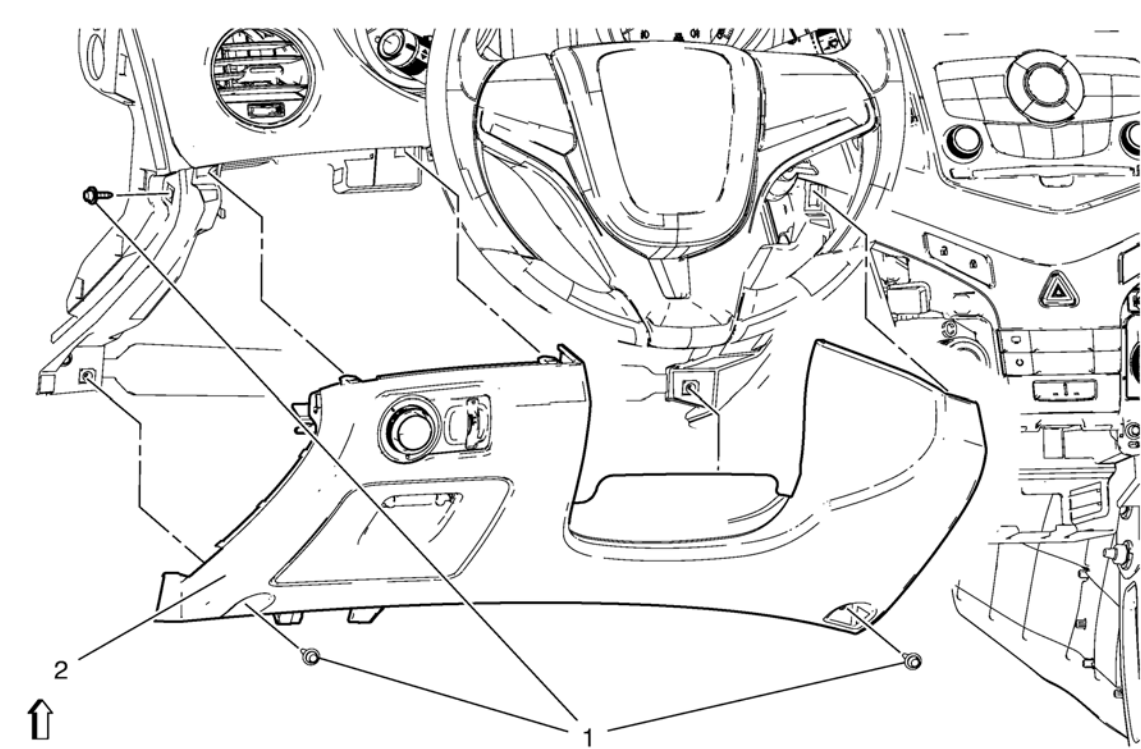

Callout	Component Name
Preliminary Procedure Remove the left outer trim cover. Refer to Instrument Panel Outer Trim Cover Replacement - Left Side .	
1	Instrument Panel Lower Trim Pad Cover Screw (Qty: 3) Caution: Refer to Fastener Caution in the Preface section. Tighten 2.5 N·m (23 lb in)
2	Instrument Panel Lower Trim Pad Cover Assembly Procedure 1. Remove headlamp switch. 2. Disconnect the electrical connectors. 3. When replacing the lower trim pad cover, transfer all necessary components.