



15. Position and set hydraulic lifter in connection with *CH-904* frame and *CH-49289-50* adapter (2) onto suspension frame (1). Pull away front engine compartment cover slightly..
16. Lower suspension frame max. **55 mm**.

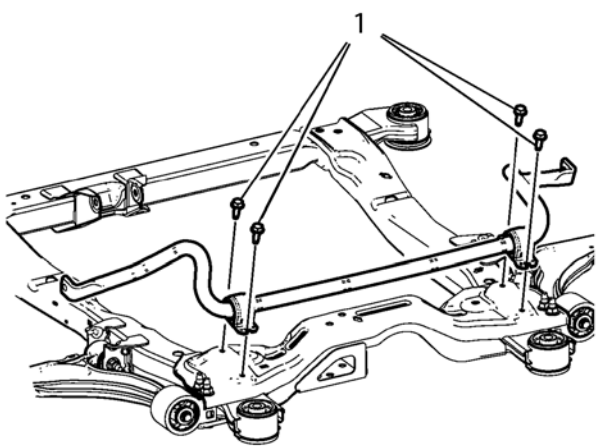

17. Remove the 4 front stabilizer shaft insulator clam bolts (1).
18. Remove the stabilizer shaft.


Installation Procedure

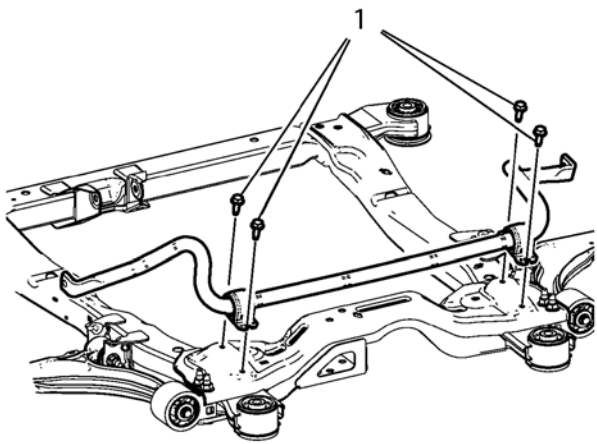

1. Install the stabilizer shaft.

**Caution:** Refer to [Fastener Caution](#) in the Preface section.

2. Install the 4 front stabilizer shaft insulator clam bolts (1) and tighten to **22 N·m (17 lb ft) plus 30 degrees**.

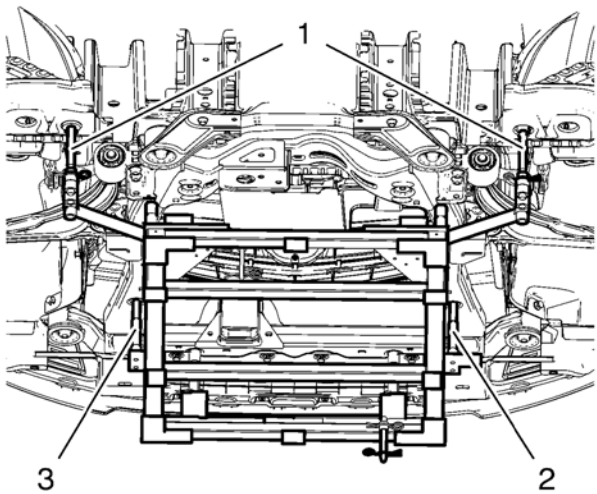

3. Move out the positioning pins (1) of *CH 49289* adapter .