


6. Install the stabilizer shaft link nut (1) and tighten to **65 N·m (48 lb ft)**.

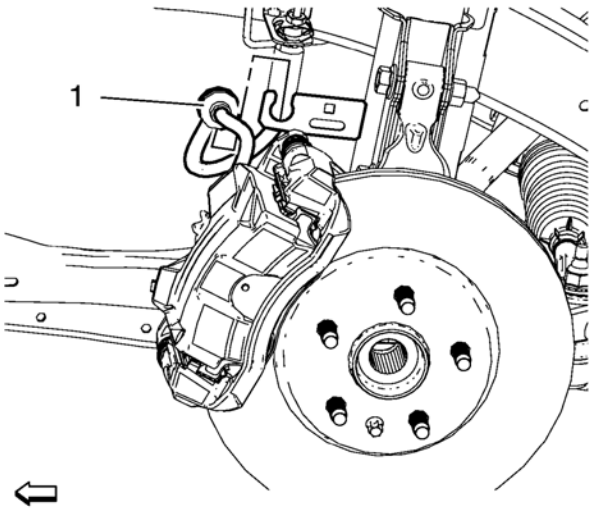

- 7. Install the brake hose (1) to the strut.
- 8. Install the front tire and wheel assembly. Refer to [Tire and Wheel Removal and Installation](#).
- 9. Lower the vehicle.
- 10. Check the front end alignment specifications. Refer to [Wheel Alignment Specifications](#).