


Rear Compartment Lid Replacement

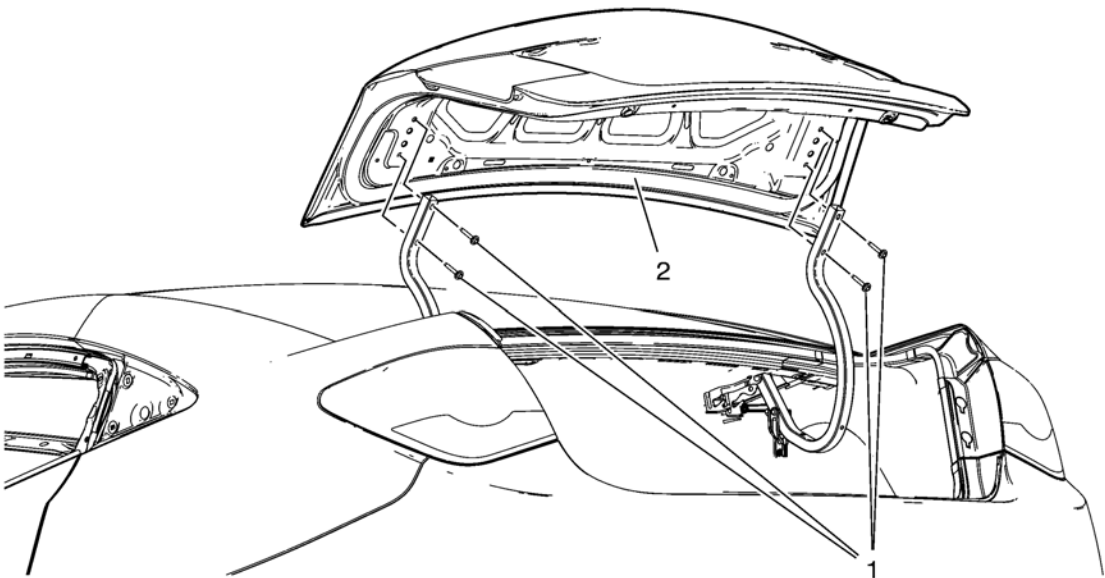

Callout	Component Name
Preliminary Procedure Remove the rear compartment lid inner panel trim. Refer to Rear Compartment Lid Inner Panel Trim Replacement .	
1	Rear Compartment Lid Hinge Bolt (Qty: 4) Caution: Refer to Fastener Caution in the Preface section. Tighten 9 N·m (80 lb ft)
2	Rear Compartment Lid Procedure 1. Disconnect the electrical connector. 2. Adjust rear compartment as needed. Refer to Rear Compartment Lid Adjustment . 3. Transfer components as necessary.