


**Note:** The recess (2) of the fine tothing in the universal joint have to align precisely with the recess (1) of the fine tothing on the steering pinion. The bore in the universal joint has to align with the groove on the steering pinion (3).

2. Push universal joint onto steering pinion carefully as desribed above inthe note.

**Caution:** Refer to [Fastener Caution](#) in the Preface section.

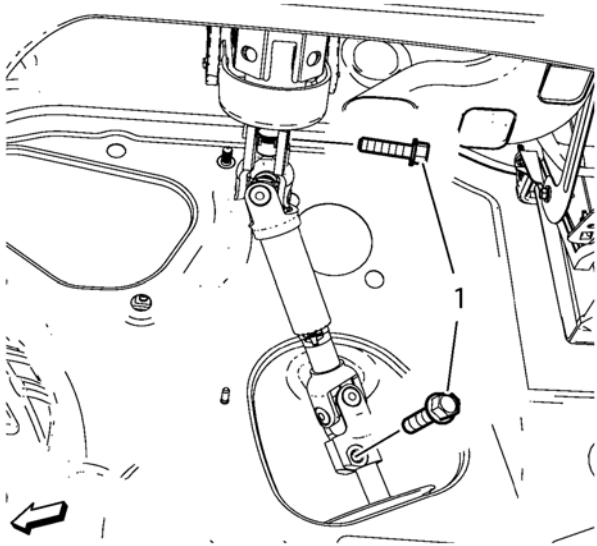

3. Install the 2 intermediate steering shaft bolts (1). Tighten the intermediate steering shaft bolts **34 N·m (25 lb ft)**.