



Shock Absorber Replacement

Removal Procedure

1. Raise and suitably support the vehicle. Refer to [Lifting and Jacking the Vehicle](#).
2. Remove the tire and wheel assembly. Refer to [Tire and Wheel Removal and Installation](#).
3. Support the rear axle with a tall jack stand near the shock absorber.

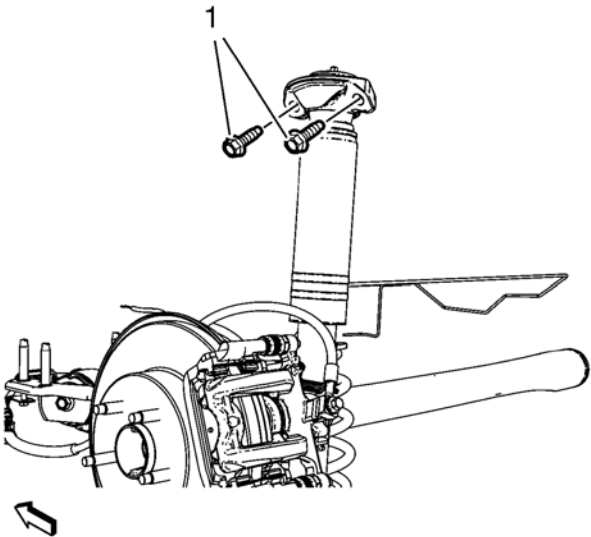

4. Remove the upper shock absorber bolts (1).

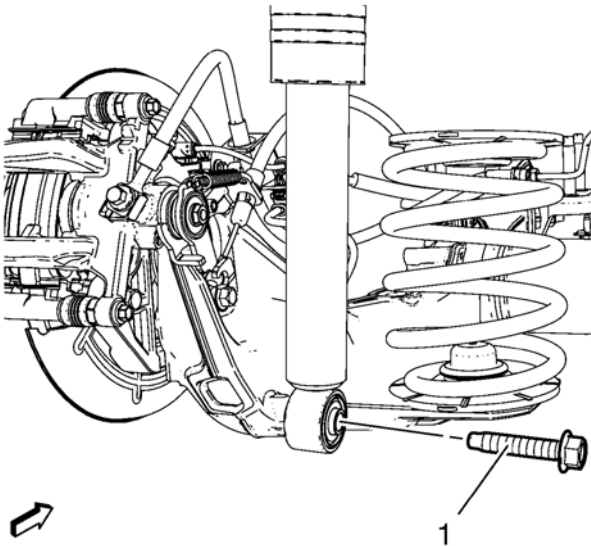


5. Remove the lower shock absorber bolt (1).

Installation Procedure

1. Position the shock absorber to the vehicle.

Caution: Refer to [Fastener Caution](#) in the Preface section.

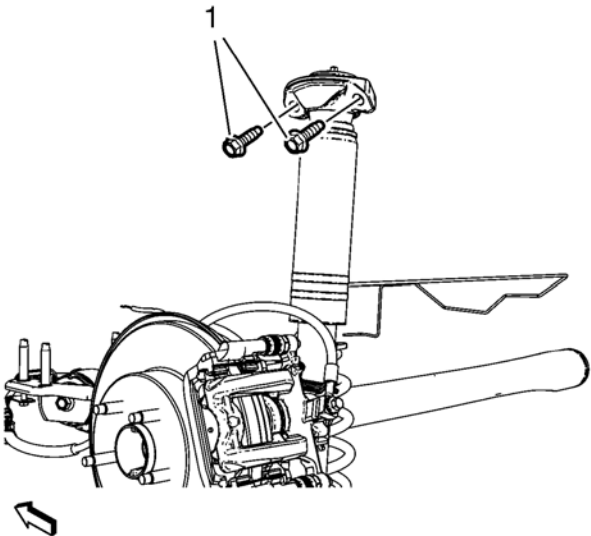

2. Install NEW upper shock absorber bolts (1) and tighten to **100 N·m (74 lb in)**.