

Drivetrain and Front Suspension Frame Insulator Replacement


Special Tools

- CH 49460-1 Adapter
- CH 49460-2 Adapter
- CH 6616 Hydraulic Hand Pump
- CH 6615-10 Hydraulic Cylinder
- CH-48377-1 Chisel


For equivalent regional tools. Refer to [Special Tools](#).

Removal Procedure

1. Remove the drivetrain and front suspension frame. Refer to [Drivetrain and Front Suspension Frame Replacement](#).

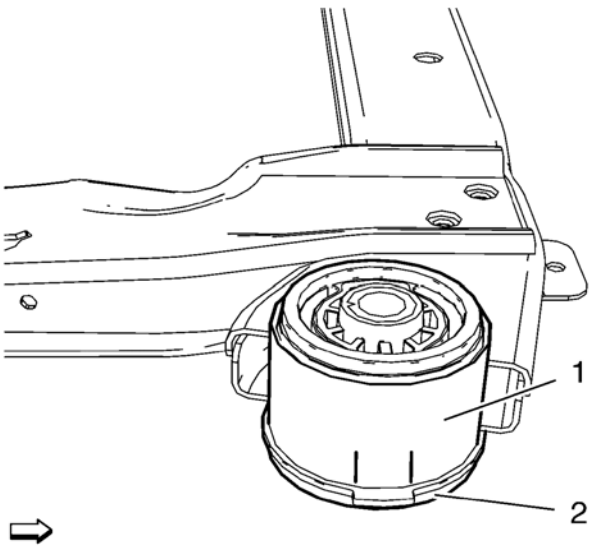


2. Mark Installation position of insulator (2) at frame (1).

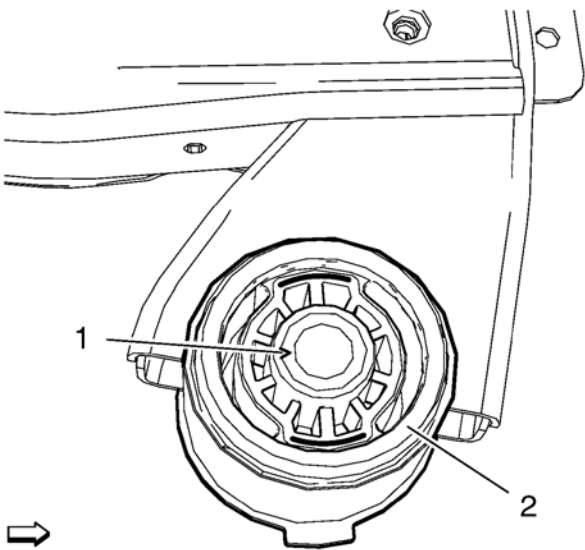

3. Cut out frame insulator core (1) from frame insulator (2).

Note: On the rear insulator drill holes into the rubber in order to gain free access for jigsaw.

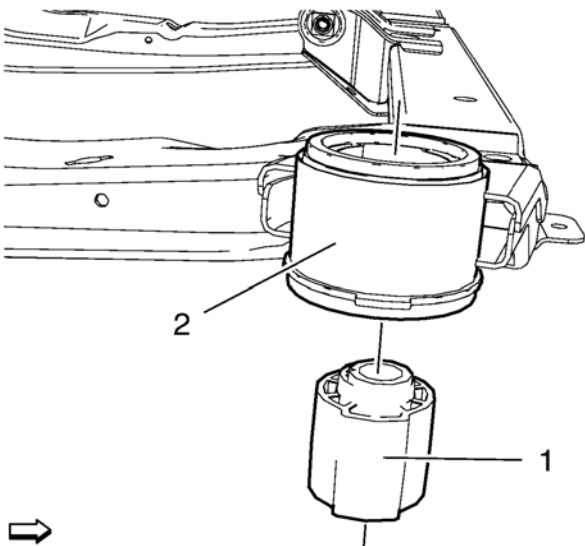

4. Remove frame insulator core (1) from outer frame insulator (2).