


Rear Side Door Locking Rod Replacement

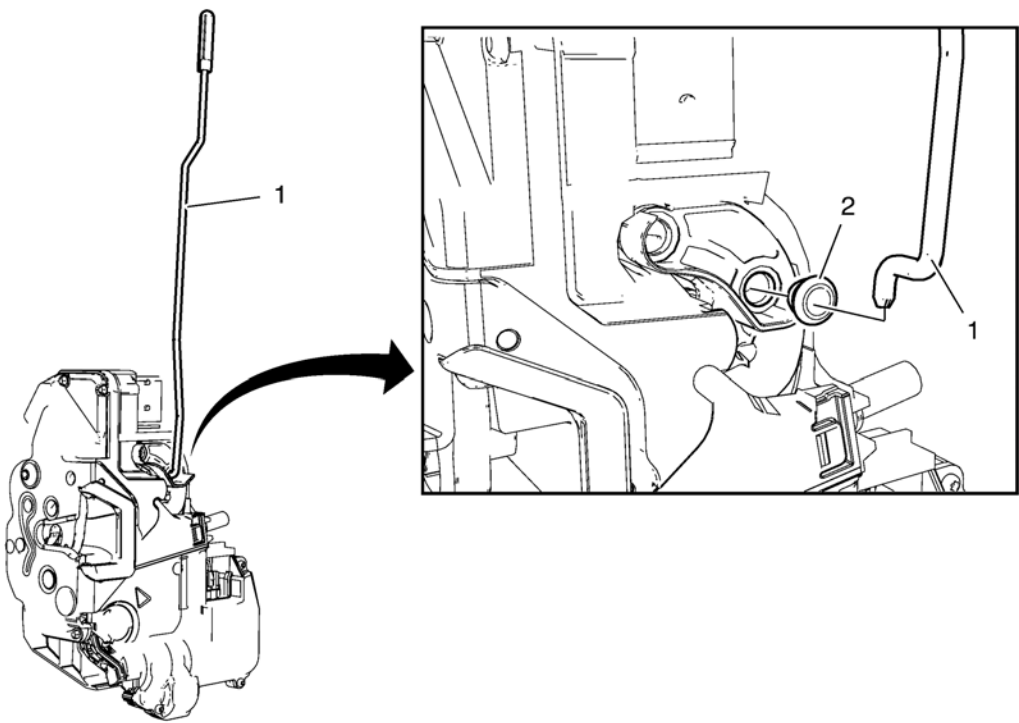

Callout	Component Name
Preliminary Procedure 1. Remove the rear side door trim. Refer to Rear Side Door Trim Replacement 2. Remove the water deflector. Refer to Rear Side Door Water Deflector Replacement 3. Remove the rear side door lock. Refer to Rear Door Lock Replacement	
1	Rear Side Door Lock Rod Procedure Inspect the lock, lock cylinder and handle adjustments. Refer to Rear Side Door Outside Handle Rod Adjustment
2	Rear Side Door Locking Rod Clip