


Rear Compartment Lid Wiring Harness Replacement

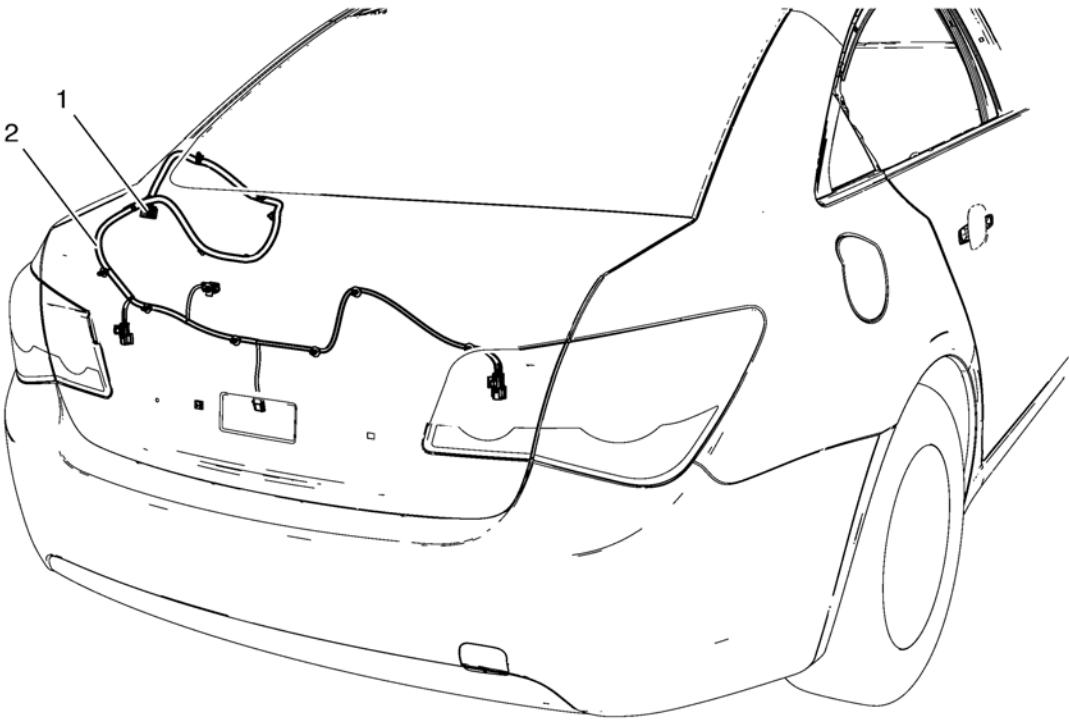

Callout	Component Name
Preliminary Procedure Remove the rear compartment lid inner panel trim. Refer to Rear Compartment Lid Inner Panel Trim Replacement .	
1	Rear Compartment Lid Wiring Harness Plug Procedure <div>1. Disconnect the battery. 2. Release the locking device to disconnect the wiring harness plug.</div>
2	Rear Compartment Lid Wiring Harness