


Rear Compartment Lid Latch Striker Replacement

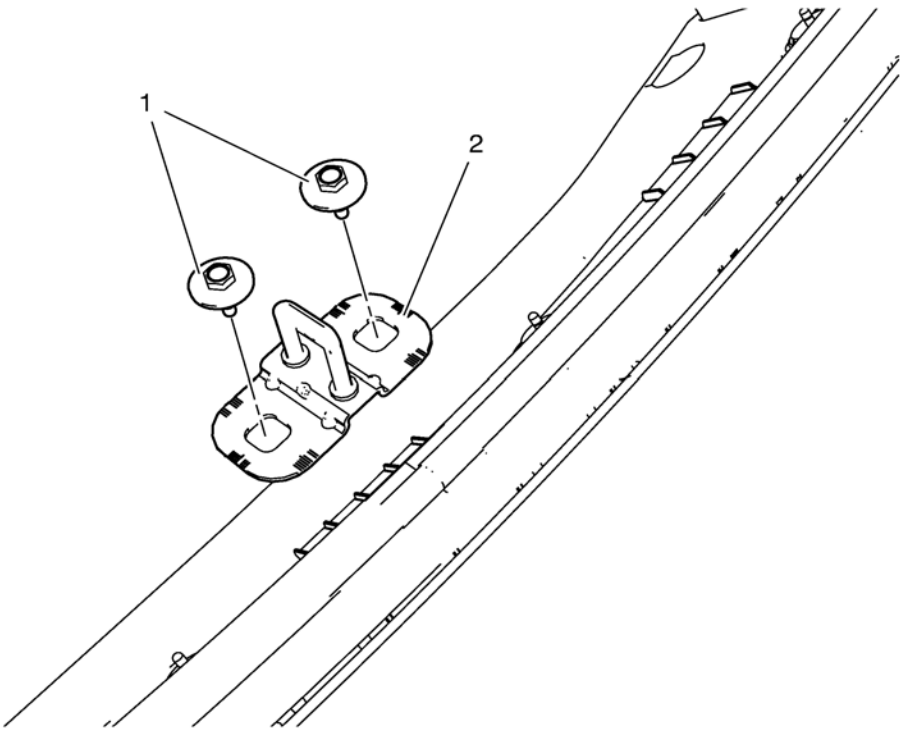

Callout	Component Name
<p><b>Preliminary Procedure</b></p> <p>Remove the rear compartment sill trim plate. Refer to <a href="#">Rear Compartment Sill Trim Plate Replacement</a>.</p>	
1	<p>Rear Compartment Lid Latch Striker Bolt (Qty: 2)</p> <p><b>Caution:</b> Refer to <a href="#">Fastener Caution</a> in the Preface section.</p> <p><b>Procedure</b></p> <p>Use a grease pencil to outline the striker before removing the bolts.</p> <p><b>Tighten</b> 9 N·m (80 lb in)</p>
2	<p>Rear Compartment Lid Latch Striker</p> <p><b>Tip</b> Adjust the rear compartment lid latch striker after replacing, if needed.</p>