


Shoulder Belt Replacement - Rear

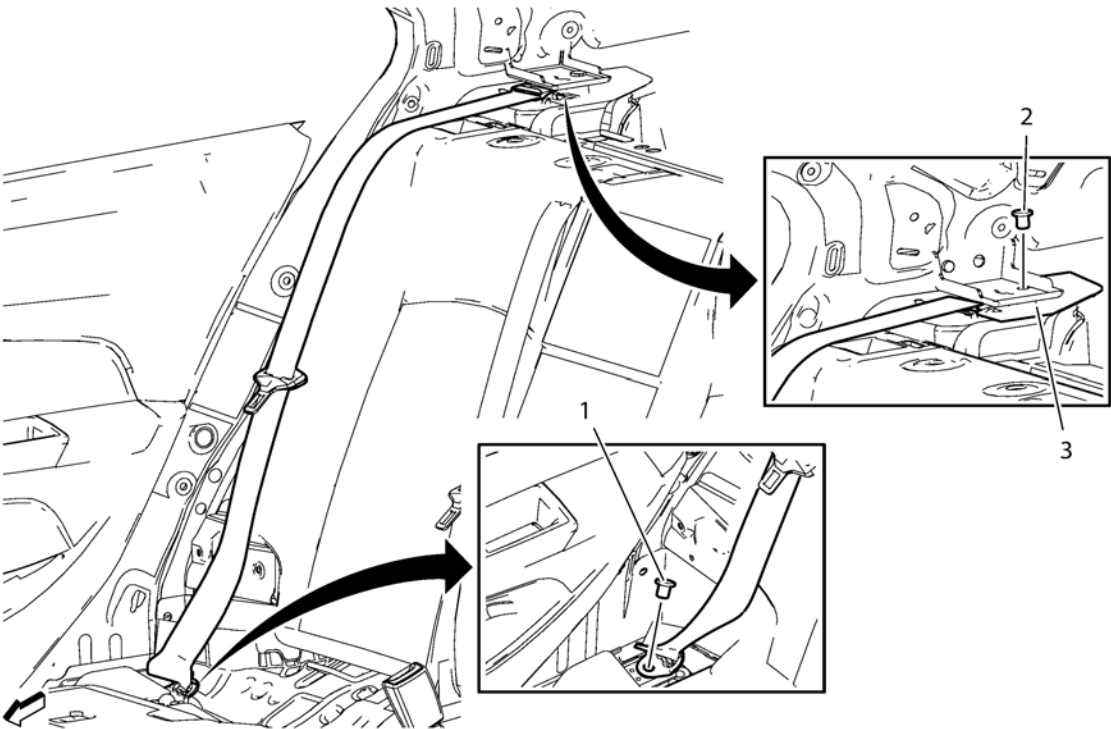

Callout	Component Name
<b>Preliminary Procedure</b>  1. Remove the body side trim panel. Refer to <a href="#">Body Side Trim Panel Replacement - Left Side</a> . 2. Remove the rear window panel trim. Refer to <a href="#">Rear Window Panel Trim Replacement</a> .	
1	Rear Seat Shoulder Belt Anchor Plate Bolt <b>Caution:</b> Refer to <a href="#">Fastener Caution</a> in the Preface section. <b>Tighten</b> 45 N·m (33 lb ft)
2	Rear Seat Shoulder Belt Retractor Bolt <b>Tighten</b> 45 N·m (33 lb ft)
3	Rear Seat Shoulder Belt Assembly