


Rear Side Door Stationary Window Replacement

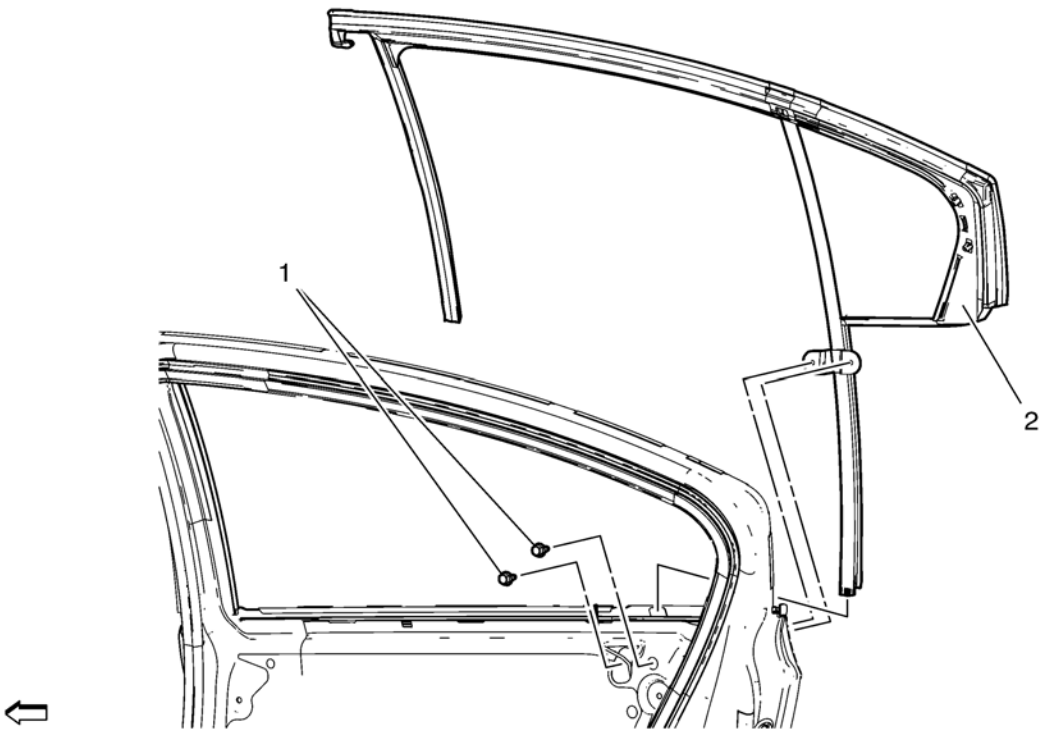

Callout	Component Name
<p><b>Preliminary Procedures</b></p> <p>1. Remove the rear side door trim panel. Refer to <a href="#">Rear Side Door Trim Replacement</a>.</p> <p>2. Remove the rear side water deflector. Refer to <a href="#">Rear Side Door Water Deflector Replacement</a>.</p> <p>3. Remove the rear door window outer sealing strip. Refer to <a href="#">Rear Side Door Window Outer Sealing Strip Replacement</a>.</p> <p>4. Remove the rear side door window. Refer to <a href="#">Rear Side Door Window Replacement</a>.</p>	
1	<p>Rear Side Door Stationary Window Bolt (Qty: 2)</p> <p><b>Caution:</b> Refer to <a href="#">Fastener Caution</a> in the Preface section.</p> <p><b>Tighten</b> 8 N·m (71 lb in)</p>
2	<p>Rear Door Stationary Window</p> <p><b>Tip:</b> Pull the bulb straight from the lamp harness socket.</p>