


Front Wheelhouse Liner Replacement

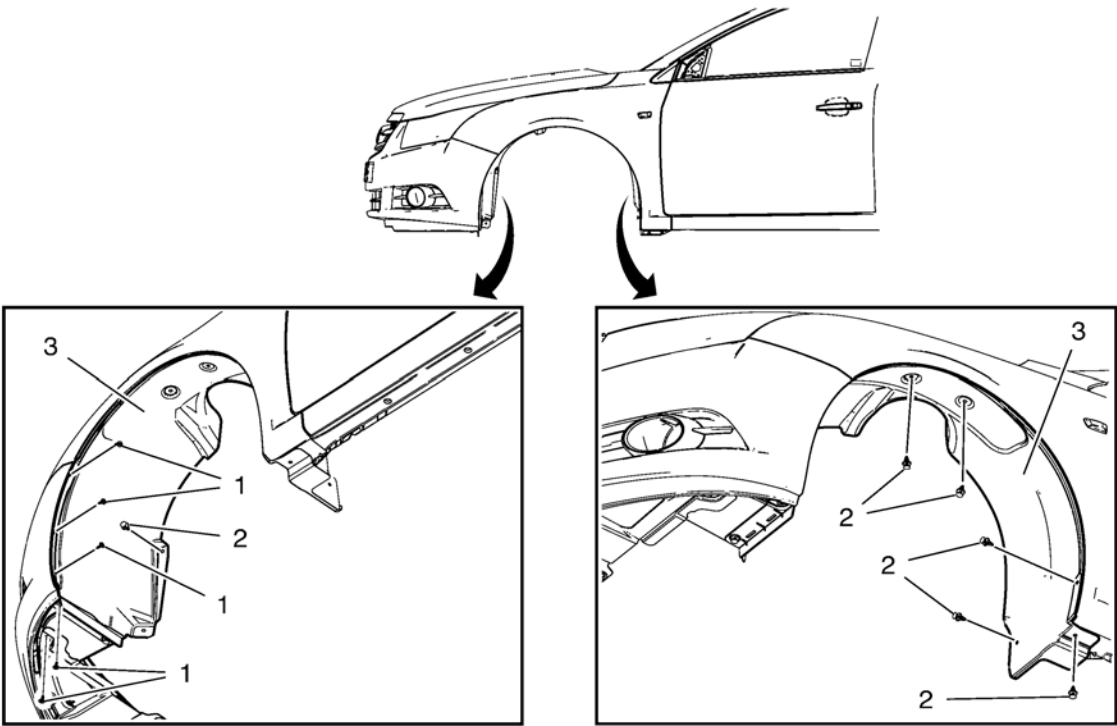

Callout	Component Name
Preliminary Procedure Remove the tire and wheel assembly. Refer to Tire and Wheel Removal and Installation .	
1	Front Wheelhouse Liner Screw (Qty: 5) Caution: Refer to Fastener Caution in the Preface section. Tighten 2.5 N·m (23 lb in)
2	Front Wheelhouse Liner Plastic Retainer (Qty: 7)
3	Front Wheelhouse Liner