


Front Fog Lamp Replacement

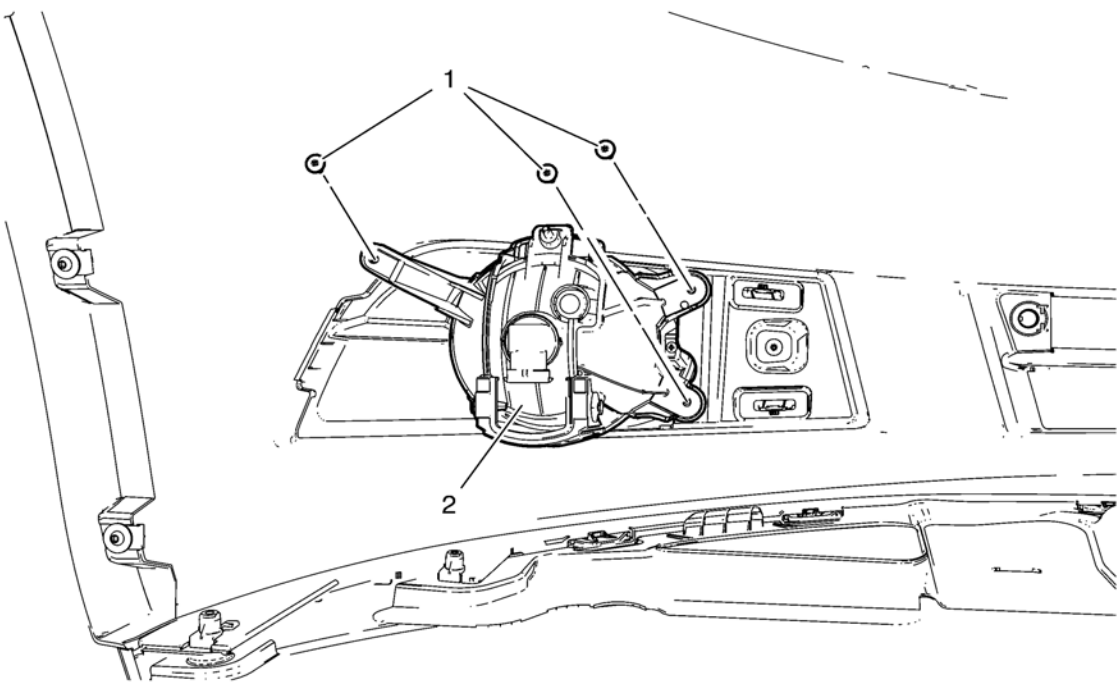

Callout	Component Name
<p><b>Preliminary Procedures</b></p> <p>1. Raise and support the vehicle. Refer to <a href="#">Lifting and Jacking the Vehicle</a>.</p> <p>2. Remove the front bumper fascia. Refer to <a href="#">Front Bumper Fascia Replacement</a>.</p> <p>3. Disconnect fog lamp bulb socket electrical connector.</p>	
1	<p>Front Fog Lamp Screws (Qty: 3)</p> <p><b>Caution:</b> Refer to <a href="#">Fastener Caution</a> in the Preface section.</p> <p><b>Tighten</b> 2.5 N·m (23 lb in)</p>
2	<p>Front Fog Lamp Assembly</p> <p><b>Procedure</b></p> <p>1. Remove the lamp assembly from the fog lamp bracket.</p> <p>2. Aim the fog lamp after installation. Refer to <a href="#">Fog Lamp Aiming</a>.</p>