



11. Remove the front end upper tie bar (1).

Installation Procedure

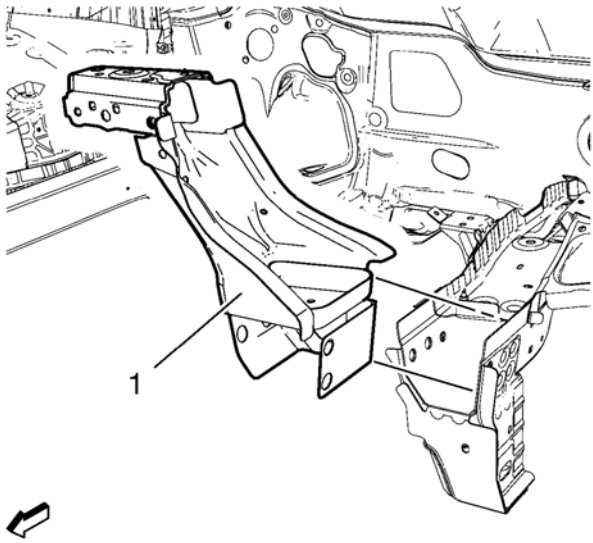

1. Position the front end upper tie bar (1) on the vehicle.
2. Verify the fit of the front end upper tie bar.
3. Clamp the front end upper tie bar into position.

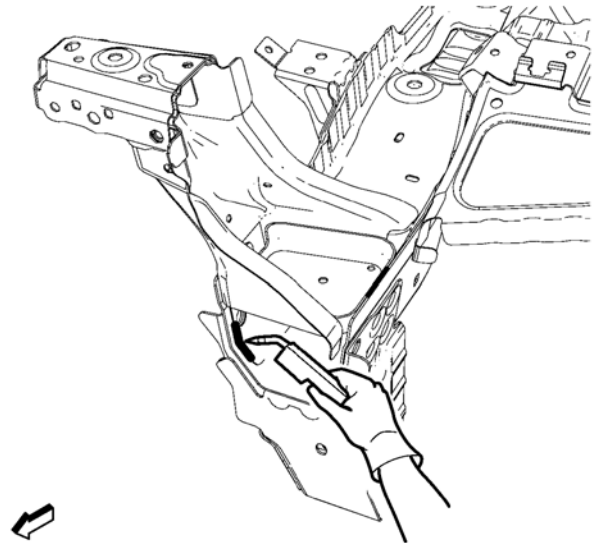

4. Weld seam accordingly.

