


Rear Side Door Check Replacement

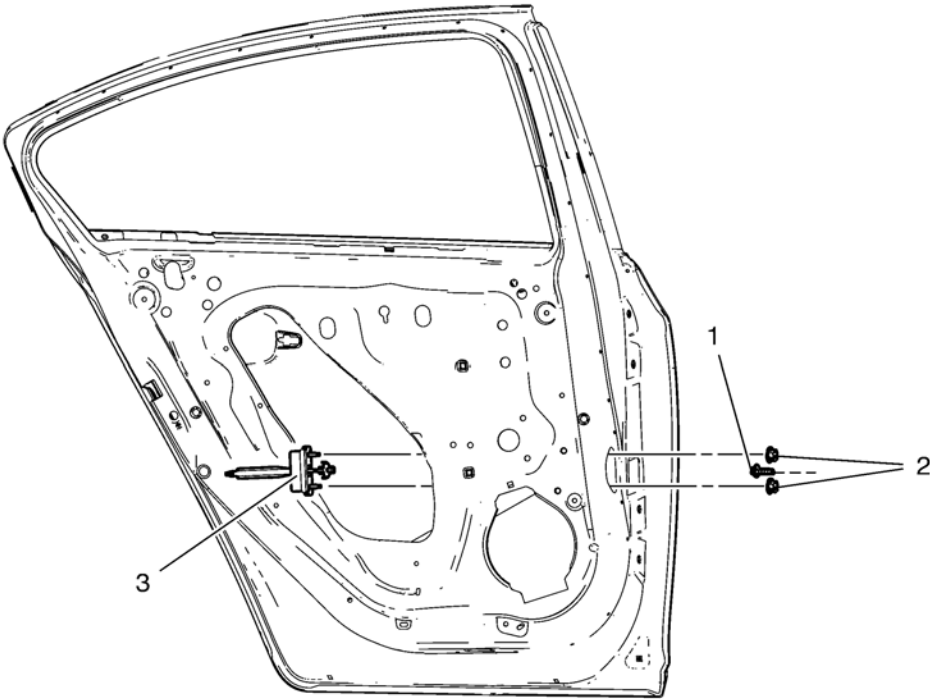

Callout	Component Name
Preliminary Procedure 1. Remove rear side door trim panel. Refer to Rear Side Door Trim Replacement 2. Remove the rear side door water deflector. Refer to Rear Side Door Water Deflector Replacement	
1	Rear Side Door Check Bolt Caution: Refer to Fastener Caution in the Preface section. Tip Place the door in the full open position. Tighten 25 N·m (18 lb ft)
2	Rear Side Door Check Nut Procedure Remove the water deflector. Tighten 9 N·m (79 lb in)
3	Rear Side Door Check