


5. Cast out frame insulator (3) from drivetrain and front suspension frame (1) with *CH-48377-1* chisel (2).

Installation Procedure

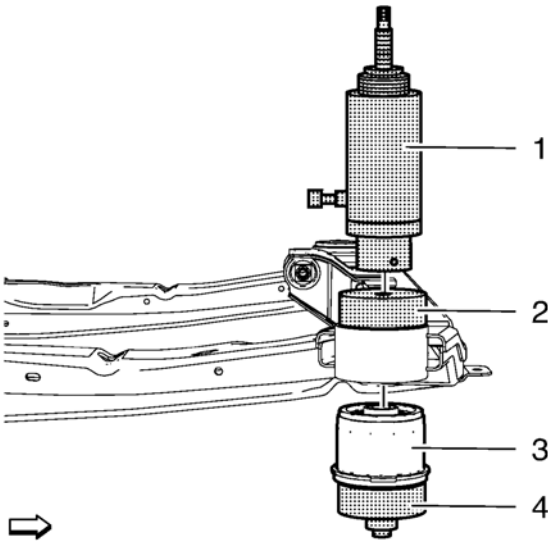

1. Install the following components on the drivetrain and front suspension frame:
- *CH 49460-1* adapter (2).
 - *CH 49460-2* adapter (4).
 - *CH 6615-10* hydraulic cylinder (1).
 - NEW frame insulator (3)

Note: Check marking of frame insulator.

2. Press carefully the frame insulator in to the front suspension frame, using *CH 6616* hand pump .
3. Remove the following components from the drivetrain and front suspension frame:
- *CH 49460-1* adapter .
 - *CH 49460-2* adapter .
 - *CH 6615-10* hydraulic cylinder .
4. Install the drivetrain and front suspension frame. Refer to [Drivetrain and Front Suspension Frame Replacement](#).