



9. Remove the front wheelhouse.

Installation Procedure

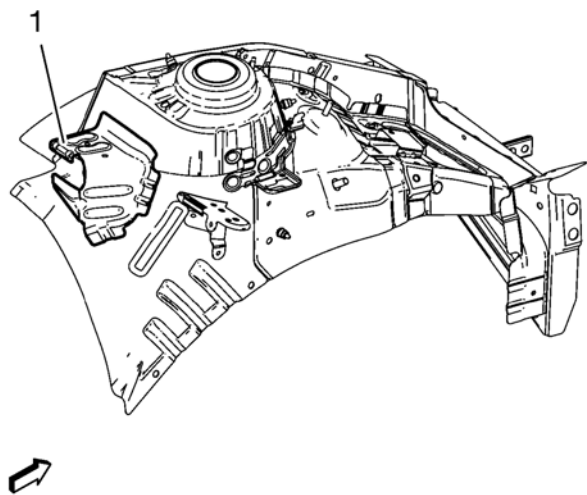

1. Remove the front wheelhouse rear panel brace (1) from service panel.

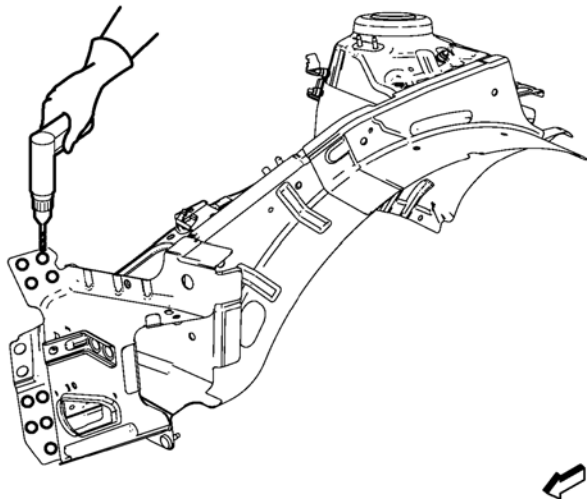

2. Drill 8 mm (5/16 in) for plug welding instead of the adhesive noted from the front area of the original panel.

