


Radio Replacement

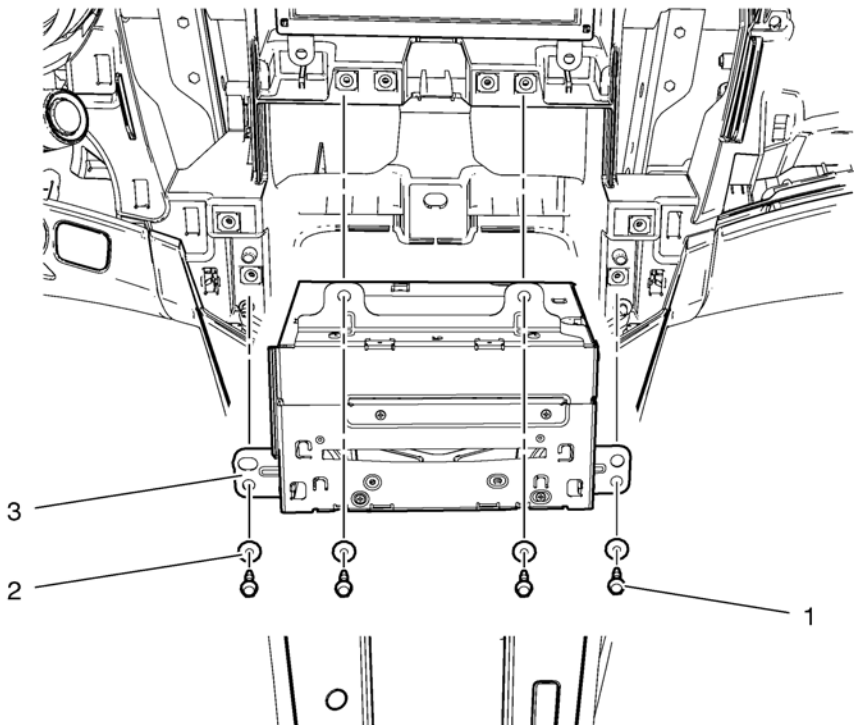

Callout	Component Name
<b>Preliminary Procedure</b>  1. Disconnect the battery negative cable. Refer to <a href="#">Battery Disconnect Warning</a> 2. Remove radio control module. Refer to <a href="#">Radio Control Module Replacement</a>	
1	Radio Bolts (Qty: 4)  <b>Caution:</b> Refer to <a href="#">Fastener Caution</a> in the Preface section.  <b>Tighten</b> 2.5 N·m(22 lb in)
2	Radio Bolt Washer (Qty: 4)
3	Radio Assembly  <b>Procedure</b>  1. Disconnect electrical components. 2. After repairs, refer to <a href="#">Control Module References</a> for programming and set up information.