



16. Position and set hydraulic lifter in connection with *CH 904* frame and *CH 49289-50* adapter (2) onto suspension frame (1). Bent from cover beside.
17. Lower suspension frame max. 55 mm.

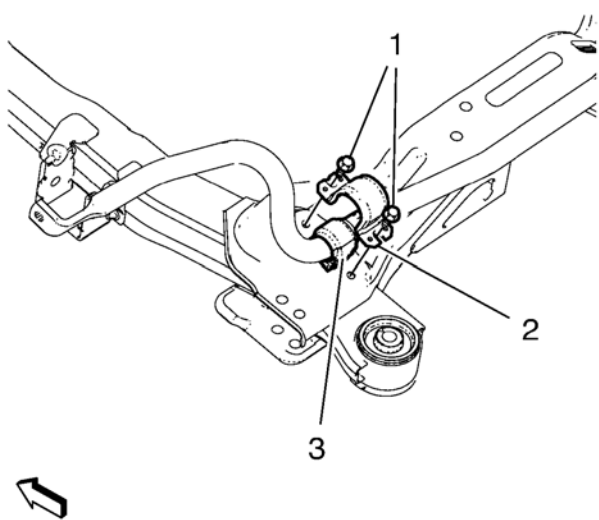

Note: In order to assure a correct installation of the insulators **ONLY** remove and install the insulators side by side! Dismantled **MUST BE** discarded.


18. Remove and discard the two front stabilizer shaft insulator clamp bolts (1).
19. Remove the shaft insulator clamp (2).

Bend up clamp (2) slightly.

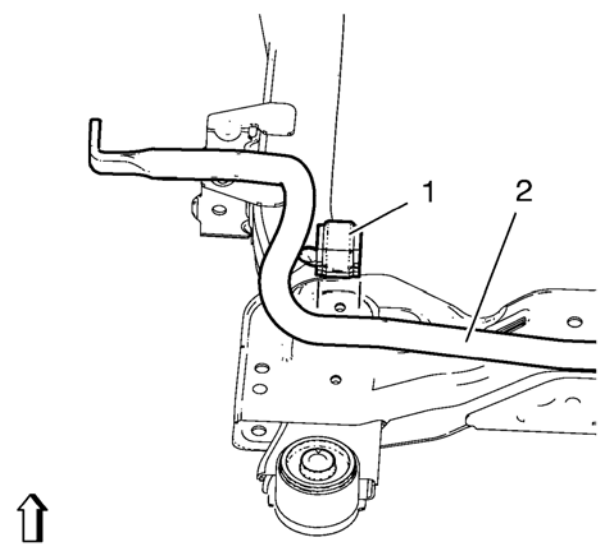

20. Mark the location of the insulator (1) to the stabilizer shaft (2).
21. Remove insulator (1) from stabilizer shaft (2).

Installation Procedure

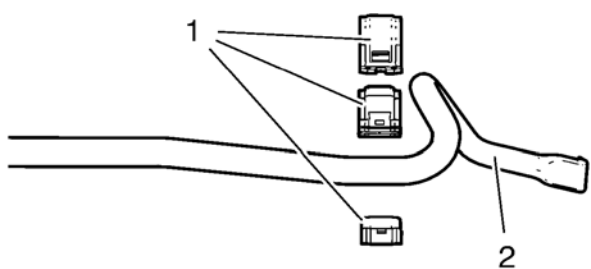

1. Install NEW stabilizer shaft insulators (1) to stabilizer shaft (2) so that the slit in the insulator is facing the rear of the vehicle.