


Rear Side Door Outside Handle Replacement

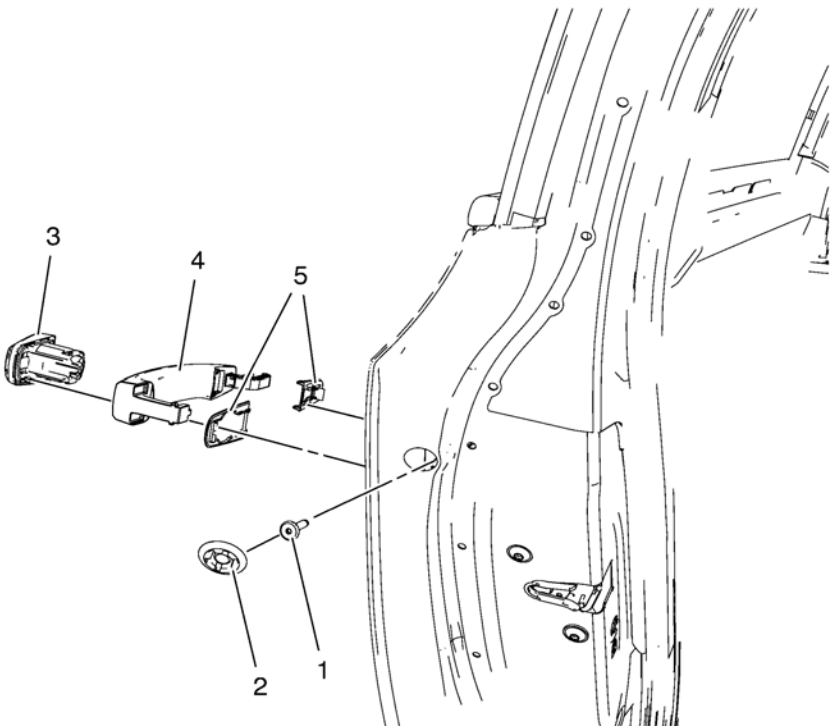

Callout	Component Name
1	<div>Bolt Access Plug</div> <div>Procedure</div> <div>Use a plastic flat-bladed tool to remove.</div>
2	<div>Rear Side Door Outside Handle Cap Bolt</div> <div>Caution: Refer to Fastener Caution in the Preface section.</div> <div>Tighten</div> <div>9 N·m (80 lb in)</div>
3	<div>Rear Door Outside Handle Cap</div>
4	<div>Rear Door Outside Handle</div> <div>Procedure</div> <div>Pull the outside handle rearward to release it from the handle housing.</div>
5	<div>Rear Door Outside Handle Gasket</div> <div>Procedure</div> <div>Inspect the lock and handle adjustments. Refer to Rear Side Door Outside Handle Rod Adjustment.</div>