


Front Side Door Locking Rod Replacement

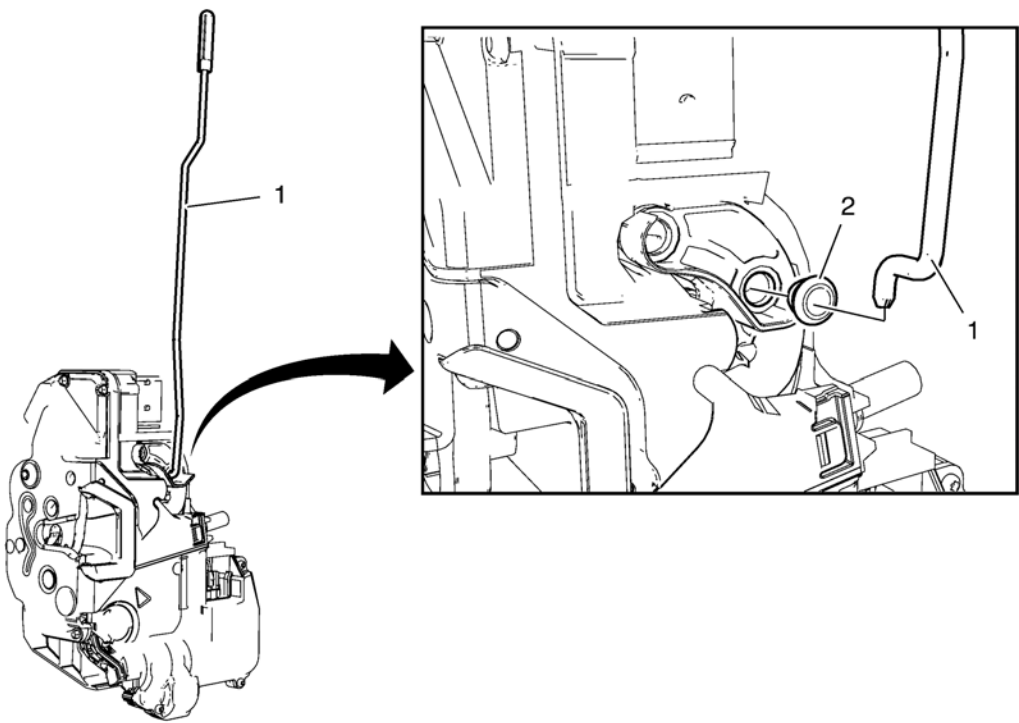

Callout	Component Name
<b>Preliminary Procedure</b>  1. Remove the interior trim panel. Refer to <a href="#">Front Side Door Trim Replacement</a> . 2. Remove the water deflector. Refer to <a href="#">Front Side Door Water Deflector Replacement</a> . 3. Remove the front side door lock. Refer to <a href="#">Front Side Door Lock Replacement</a> .	
1	Front Side Door Lock Rod  <b>Procedure</b>  Inspect the lock, lock cylinder and handle adjustments. Refer to <a href="#">Front Side Door Outside Handle Rod Adjustment</a> .
2	Front Side Door Locking Rod Clip