



2. Install A/C compressor and condenser hose nut (1) to refrigerant hose (2). Tighten nut to **19 N·m (14 lb ft)**.

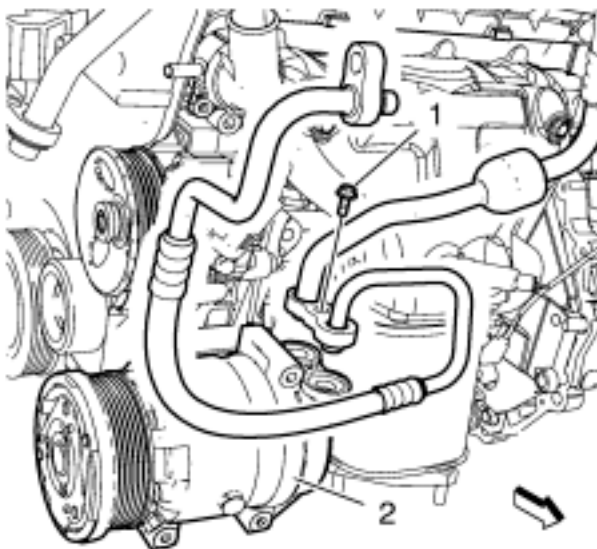

3. Install A/C compressor and condenser hose bolt (1) to A/C compressor (2). Tighten bolt to **19 N·m (14 lb ft)**.

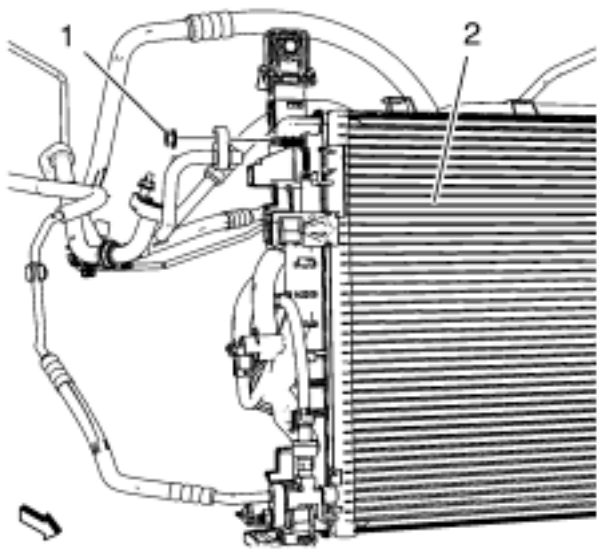

4. Install air conditioning compressor and condenser hose nut (1) to A/C condenser (2). Tighten nut to **19 N·m (14 lb ft)**.  
5. Install front bumper fascia. Refer to [Front Bumper Fascia Replacement](#).  
6. Evacuate and charge the refrigerant system. Refer to [Refrigerant Recovery and Recharging](#).