


Forward Lamp Wiring Harness Replacement

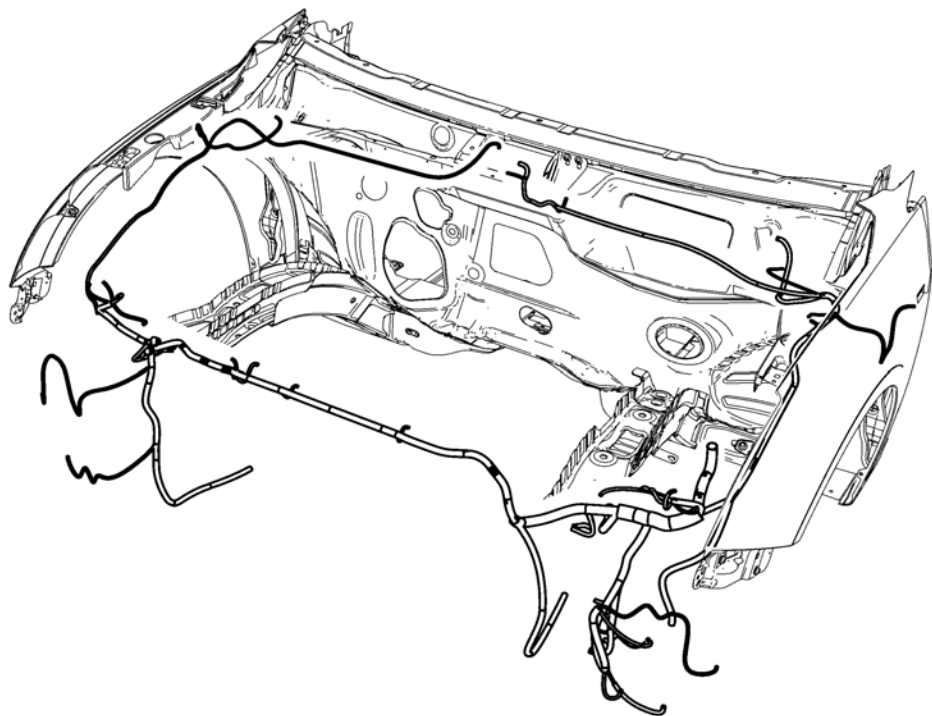

Callout	Component Name
<p><b>Preliminary Procedures</b></p> <ol style="list-style-type: none"><li>Remove the front bumper. Refer to <a href="#">Front Bumper Fascia Replacement</a>.</li><li>Remove the headlamp. Refer to <a href="#">Headlamp Replacement</a>.</li><li>Using a scan tool, check for DTCs.</li></ol>	
1	<p>Forward Lamp Wiring Harness</p> <p><b>Tip</b></p> <ul style="list-style-type: none"><li>Create a work area large enough to lay out the new and old wiring harnesses.</li><li>Use care when removing inaccessible harness retainers. Replacement retainers may not be available.</li><li>Compare the new and old wiring harnesses for the same part number, the same number of wiring harness connectors, the same pin settings, and the same harness retainers.</li><li>Follow a logical order of steps during the replacement to ensure proper installation of the harness.</li></ul>