



10. Remove the body side inner panel.

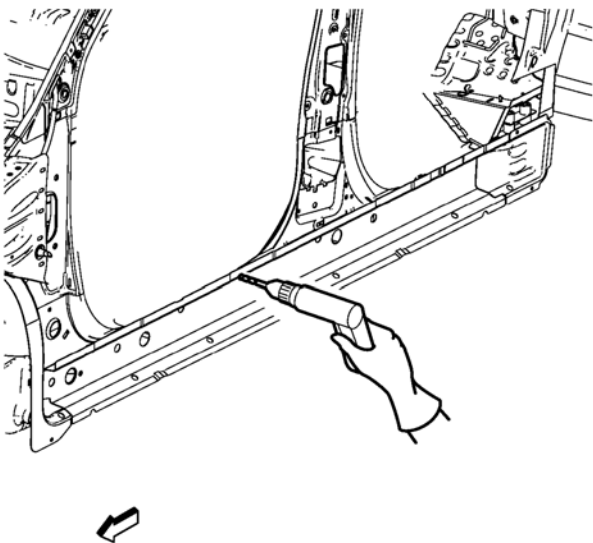

- 11. Locate and mark all the necessary factory welds of the rocker inner panel.
- 12. Drill all factory welds.

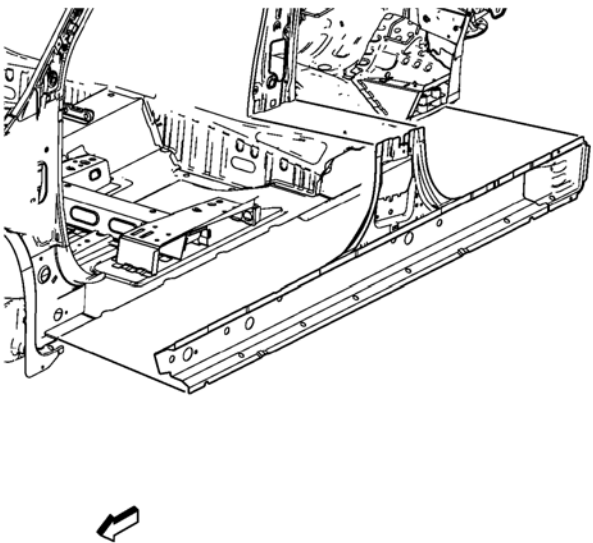

13. Remove the damaged rocker inner panel.

Installation Procedure

- 1. Align the rocker inner panel.
- 2. Clean and prepare the attaching surfaces for spot welding.
- 3. Apply structural adhesive to all attaching surfaces.

