


Rear Seat Back Latch Replacement (40 Percent Seat)

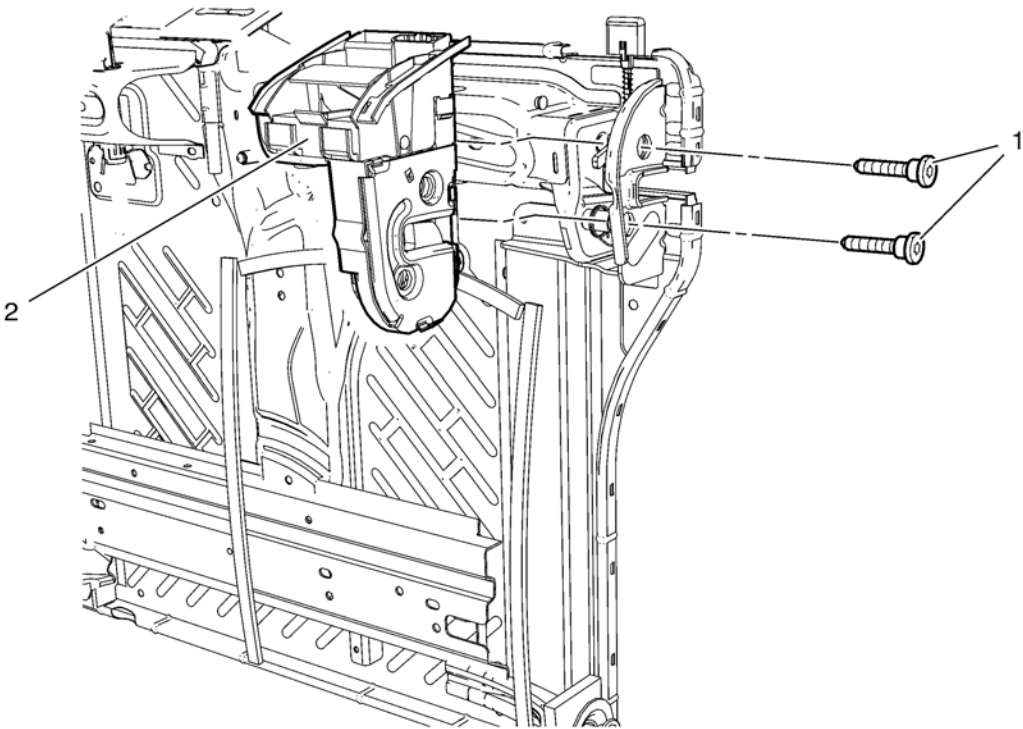

Callout	Component Name
Preliminary Procedure 1. Remove rear seat - left side. Refer to Rear Seat Replacement . 2. Remove rear seat back cushion cover and pad - left side. Refer to Rear Seat Back Cushion Cover and Pad Replacement - Left Side	
1	Rear Seat Back Latch Bolt (Qty: 2) Caution: Refer to Fastener Caution in the Preface section. Tighten 45 N·m (33 lb ft)
2	Rear Seat Back Latch