


Rear Door Lock Replacement

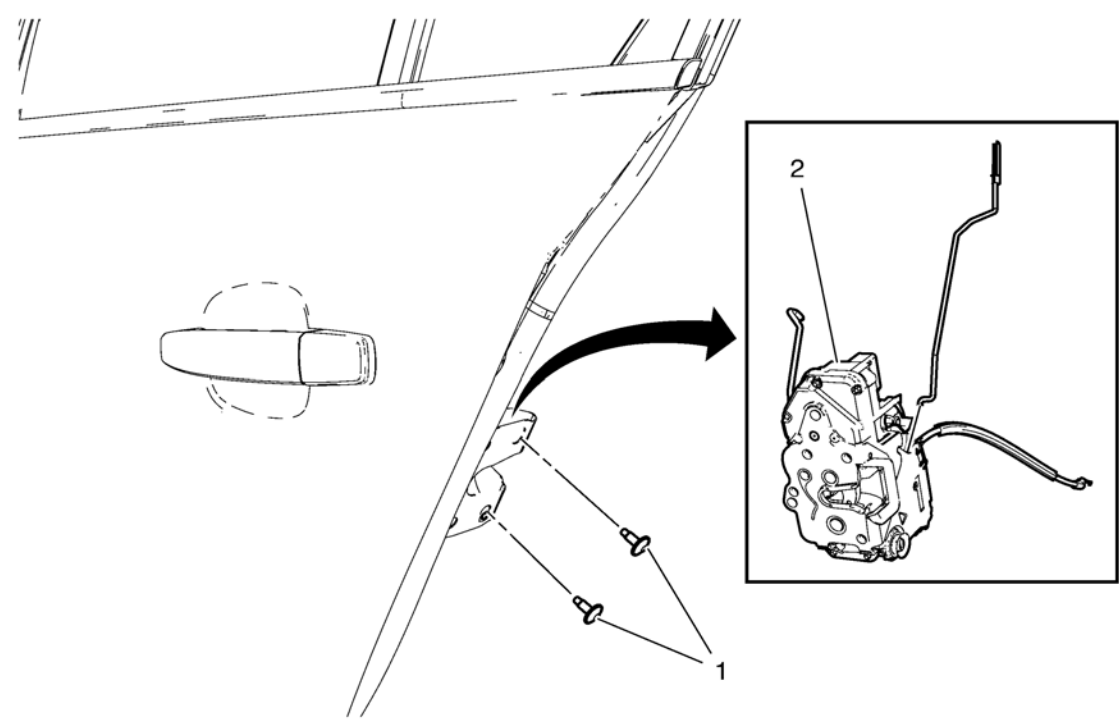

Callout	Component Name
<p>Preliminary Procedure</p> <ol style="list-style-type: none">Remove the interior trim panel. Refer to Rear Side Door Trim Replacement.Remove the water deflector. Refer to Rear Side Door Water Deflector Replacement.	
1	<p>Rear Side Door Lock Bolt (Qty: 2)</p> <p>Caution: Refer to Fastener Caution in the Preface section.</p> <p>Tighten 10 N·m (89 lb in)</p>
2	<p>Rear Side Door Lock Assembly</p> <p>Procedure</p> <ol style="list-style-type: none">Release the inside handle cable retainers before removing the door lock.Disconnect the door lock electrical connector.Remove the door lock with the handle housing.Transfer the handle and lock rods to the new door lock.Inspect the lock, lock cylinder and handle adjustments. Refer to Rear Side Door Outside Handle Rod Adjustment.