



9. Remove the front wheelhouse.

Installation Procedure

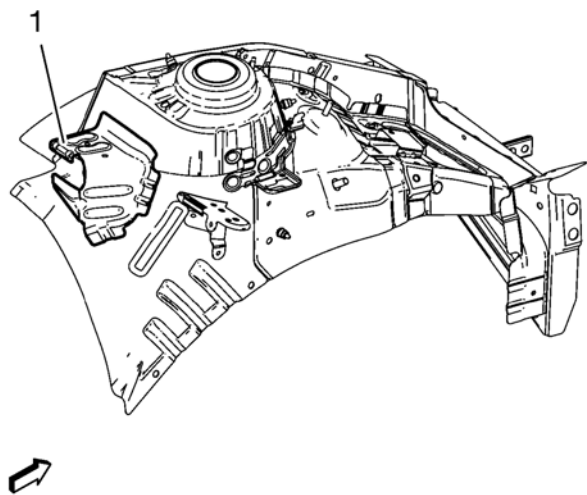

1. Remove the front wheelhouse rear panel brace (1) from service panel.

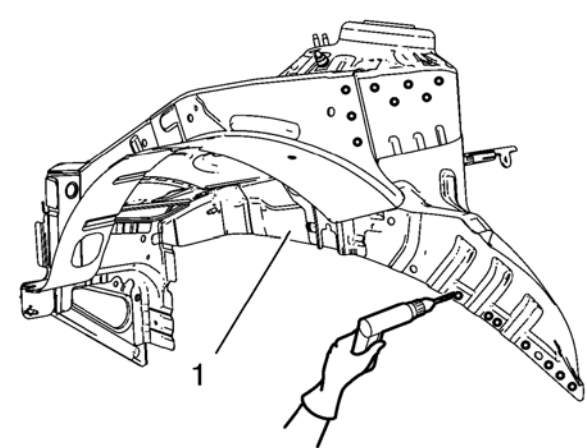

- 2. Create 6 x 20 mm (4/16 x 12/16 in) slots for MIG-brazing along the edges of the front wheelhouse (1).
- 3. Clean and prepare the attaching surfaces for brazing.

