


Exhaust Flexible Pipe Replacement (1.6L LDE, LXV, and 1.8L 2H0)

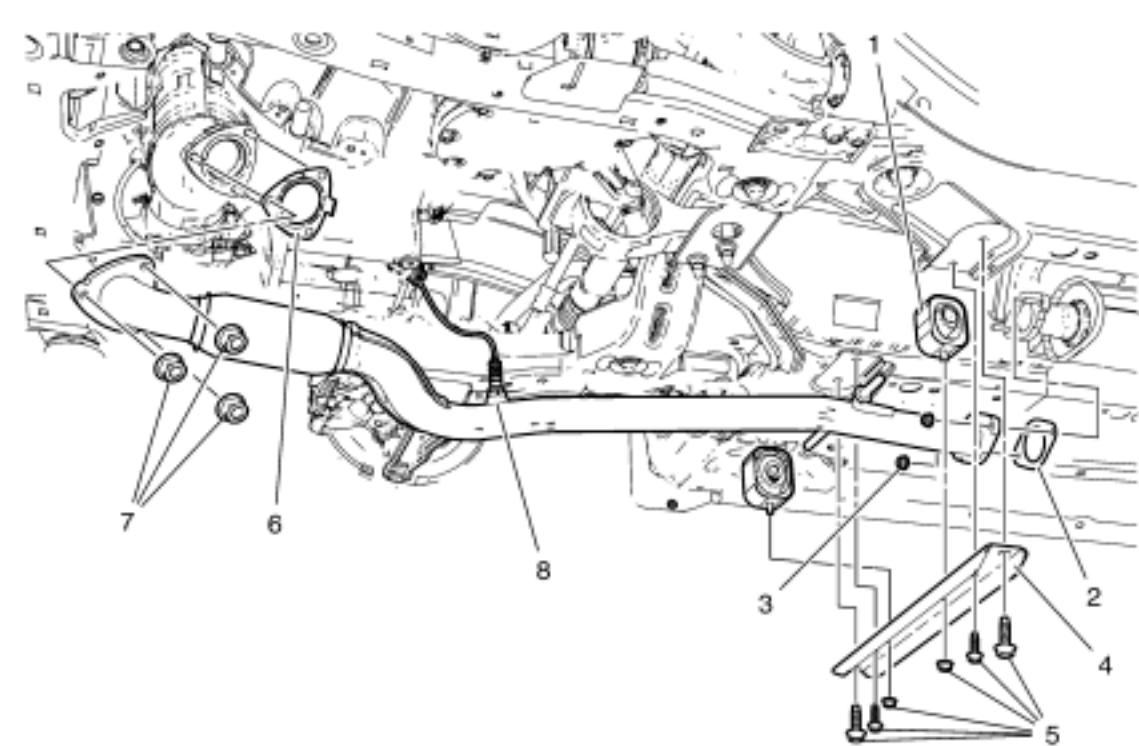

Callout	Component Name
<p>Warning: Refer to Exhaust Service Warning in the Preface section.</p> <p>Warning: Refer to Protective Goggles and Glove Warning in the Preface section.</p> <p>Preliminary Procedure</p> <p>Raise the vehicle by its full height. Refer to Lifting and Jacking the Vehicle.</p>	
1	Exhaust Muffler Insulator (Qty: 2)
2	Exhaust Flexible Pipe Gasket to Exhaust Rear Muffler
3	Exhaust Flexible Pipe to Exhaust Rear Muffler Nuts (Qty: 2) Caution: Refer to Fastener Caution in the Preface section. Tighten 17 N·m (13 lb ft)
4	Exhaust Pipe Front Hanger Bracket
5	Exhaust Pipe Front Hanger Bracket Bolts and Nuts Tighten 20 N·m (15 lb ft)
6	Catalytic Converter to Exhaust Flexible Pipe Gasket
7	Catalytic Converter to Exhaust Flexible Pipe Nuts (Qty: 3) Tighten 20 N·m (15 lb ft)
8	Heated Oxygen Sensor Tighten 40 N·m (30 lb ft)