


Center Pillar Upper Garnish Molding Replacement

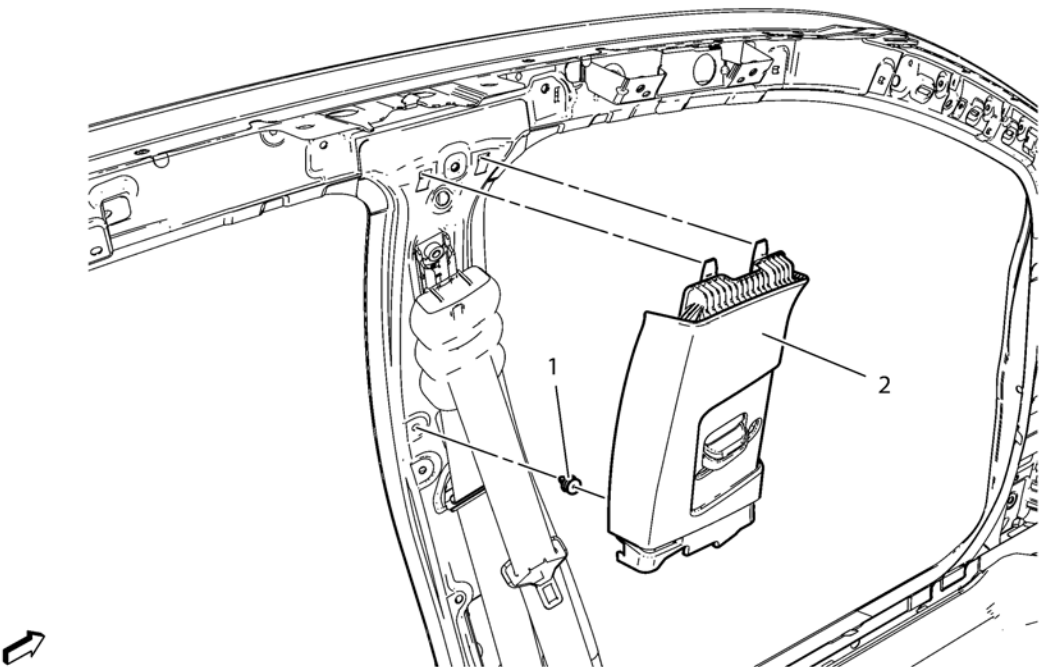

Callout	Component Name
<p>Preliminary Procedure</p> <p>1. Remove the center pillar lower garnish molding. Refer to Center Pillar Lower Garnish Molding Replacement</p> <p>2. Remove the seat belt from the front seat. Refer to Driver or Passenger Seat Retractor Side Belt Replacement</p>	
1	Center Pillar Upper Garnish Molding Clip
2	<p>Center Pillar Lower Garnish Molding Assembly</p> <p>Procedure</p> <p>When replacing the center pillar lower garnish molding, remove the seat belt through the molding.</p>